



CONTACT US

PARA LIGHT CORP. USA

🏠 515 Spanish Lane, Suite B, Walnut, CA 91789

✉ sales@paralightusa.com

☎ T+909-468-4866 F+909-468-4876

🌐 www.paralightusa.com

2022 Commercial Lighting



Chairman Mr. David Ma

Established in 1987

Capital USD 37million

No. of Employee 1028

Founded in 1987, PARA LIGHT is now a global innovator and leader in visible and invisible LED fields. With two manufacturing plants certified with ISO 14001, ISO 9001, TS16969, and also complies with REACH and RoHS.

We offer advanced and beyond expectation R&D services based on the strongest lineup ever of 1,028 employees located in different countries and cities that includes more than 70 professional engineers, and 80 Quality Assurance squad.

About the product category, from the elementary LED component to furthur appli-
ance such as UV sensor, LED back light,
integrated light moudule, commercial light-
ing, automotive lighting and any lighting
solution, PARA LIGHT keeps growing and
expanding the products diversity in response
to the global industry or market trend.

Recessed light



PL-RD1070K	08-09
PL-RD1092K	
PL-RD1125K	

Recessed Spotlight



PL-RS1075B	10-11
PL-RS1092B	

Spotlight



PL-T31045A	12-13
PL-T31055A	
PL-T31060A	
PL-SP046MD	14
PL-RS018A	15


Pendant Light



PL-SF1088D
PL-SP1095A

16-17

Slide Series

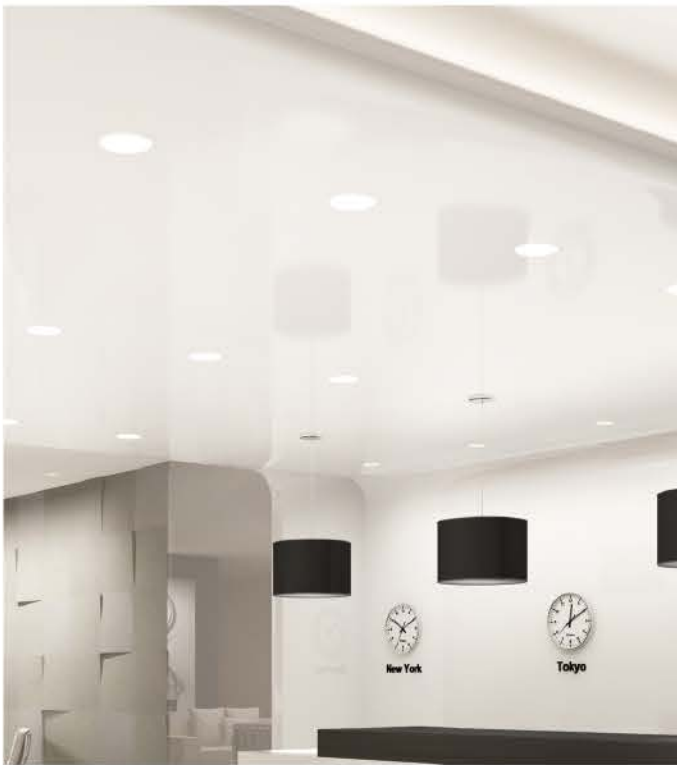

PL-RS1034A

18-19

Surface Mount



PL-SF1055A
PL-SF1075A
PL-SF1095A

20-21

Ceiling Light



PL-DS1075B
PL-DS1092B

22-23

Downlight



PL-DM4070D	24-25
PL-DM5093D	
PL-DM5125D	
PL-DM5070S	26
PL-DM5105S	
PL-DL111A	27






Recessed light




PL-RD1070K




LED	Diameter	Power	Height	Input Voltage	CCT	Optics
Bridgelux C8	Ø 70 mm	9 W	87.8 mm	DC 37V, 250 mA	2700 / 3000 / 4000 / 5000K	18° / 25° / 35°

PL-RD1092K



LED	Diameter	Power	Height	Input Voltage	CCT	Optics
Bridgelux V10B	Ø 92.5 mm	13 W	108.5 mm	DC 37V, 350 mA	2700 / 3000 / 4000 / 5000K	18° / 25° / 35°


PL-RD1125K



LED	Diameter	Power	Height	Input Voltage	CCT	Optics
Bridgelux V10B	Ø 125 mm	13 W	123.5 mm	DC 37V, 350mA	2700 / 3000 / 4000 / 5000K	18° / 25° / 35°




PL-RS1075B

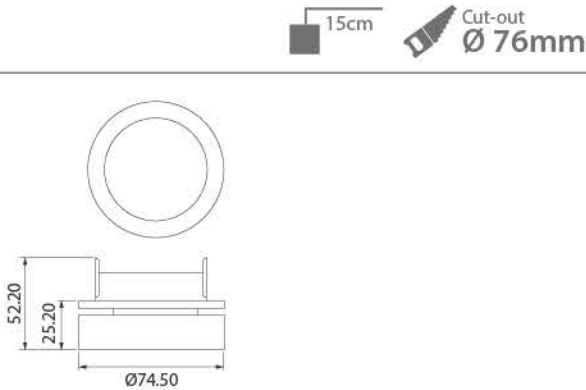

LED	Diameter	Power	Height	Input Voltage	CCT	Optics
Bridgelux V8E	Ø 74 mm	9 W	52mm	DC 37 V, 250 mA	3000 / 4000 / 5000K	11°

PL-RS1092B

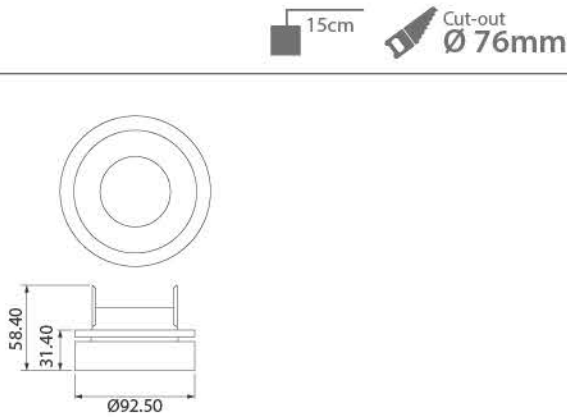

LED	Diameter	Power	Height	Input Voltage	CCT	Optics
Bridgelux V10B	Ø 92.5 mm	13 W	59 mm	DC 37 V, 350 mA	3000 / 4000 / 5000K	11°



Spotlight

Adaptor : compatible with most track systems
Mounting types for options :




White Black Silver




Interchangeable baffle

PL-T31045A




LED	Diameter	Power	Height	Input Voltage	CCT	Optics
Bridgelux V8E (DC 250mA)	Ø 45 mm	9 W	151.5 mm	AC 110-230 V	2700 / 3000 / 4000 / 5000K	15° / 24° / 36°

PL-T31055A



LED	Diameter	Power	Height	Input Voltage	CCT	Optics
Bridgelux V8E (DC 300mA)	Ø 55 mm	11 W	151.5 mm	AC 110-230 V	2700 / 3000 / 4000 / 5000K	15° / 24° / 36°


PL-T31060A



LED	Diameter	Power	Height	Input Voltage	CCT	Optics
Bridgelux V18B (DC 350mA)	Ø 60 mm	13 W	120 mm	AC 110-230 V	2700 / 3000 / 4000 / 5000K	15° / 24° / 36°

PL-SP046MD


- Features
- Interchangeable frames and lens bring the wide variations
 - Track or flush mount compatibilities
 - Driver-free

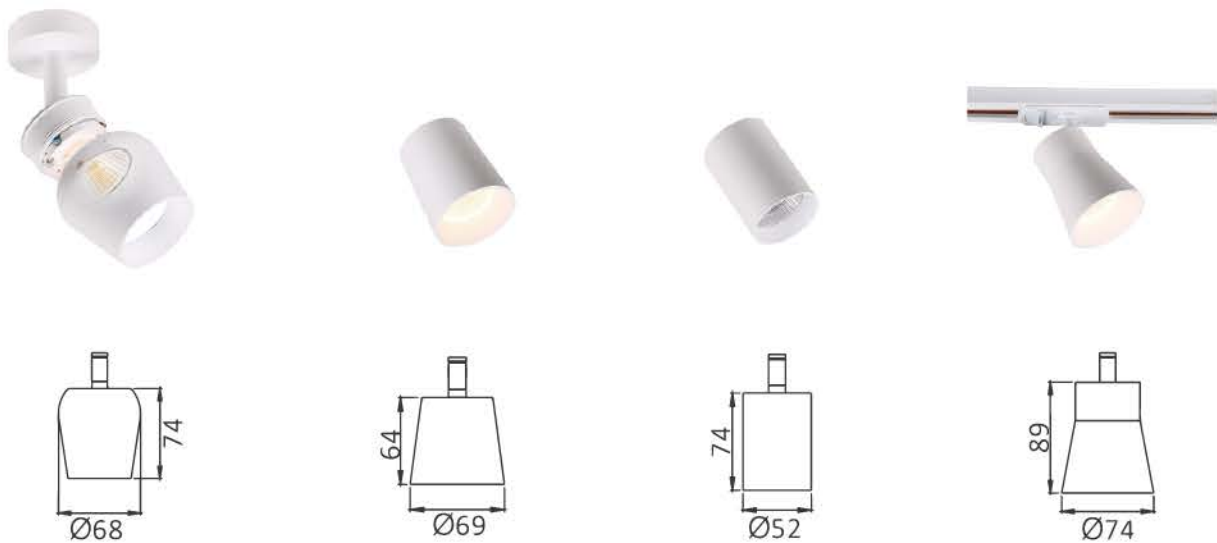

LED	Power	Input Voltage	CCT	Optics
Bridgelux / CREE	8 W	AC 220 V	3000 / 4000 / 5000	15° / 25° / 38° / 60°

PL-RS018A


- Features
- Micro Spotlight
 - Simply styled
 - Warm Dim Technology

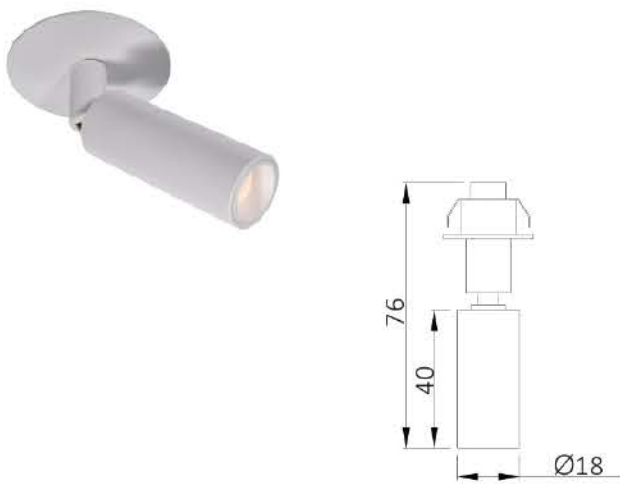

LED	Power	Input Voltage	CCT	Optics
Bridgelux / CREE	8 W	AC 220 V	3000 / 4000 / 5000	15° / 25° / 38° / 60°




PL-SF1088D



10-15cm

LED	Diameter	Power	Height	Input Voltage	CCT	Optics
CREE CXA1512	Ø 88 mm	13 W	130 mm	220 ~ 230 V	2700 / 3000 / 4000 / 5000K	15° / 25° / 38° / 60°

PL-SP1095A




10-15cm

LED	Diameter	Power	Height	Input Voltage	CCT	Optics
CREE CXA1816	Ø 95 mm	18 W	230 mm	220 ~ 230 V	2700 / 3000 / 4000 / 5000K	15° / 25° / 38° / 60°




PL-RS1034A

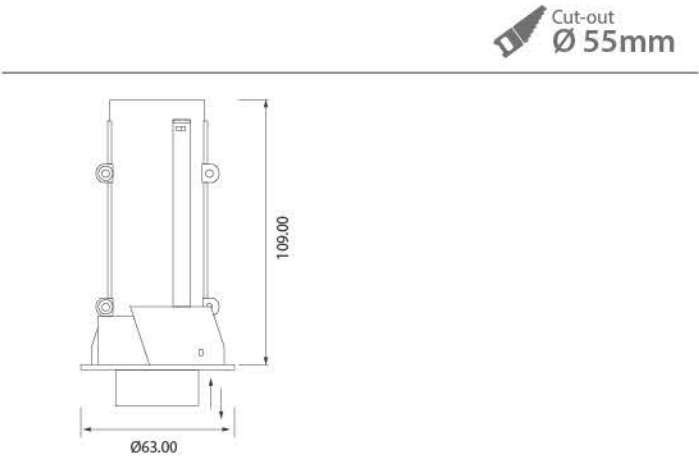

LED	Diameter	Power	Height	Input Voltage	CCT	Optics
LUMINES SST 20	Ø 63 mm	4.5 W	109 mm	DC 3V, 1500 mA	2700 / 3000 / 4000 / 5000K	20° / 30° / 40°




PL-SF1055A




LED	Diameter	Power	Height	Input Voltage	CCT	Optics
Bridgelux / CREE	Ø 55 mm	8 W	80 mm	AC 220 V	3000	15° / 25° / 38° / 60°

PL-SF1075A



LED	Diameter	Power	Height	Input Voltage	CCT	Optics
Bridgelux / CREE	Ø 75 mm	13 W	90 mm	AC 220 V	3000	15° / 25° / 38° / 60°

PL-SF1095A



LED	Diameter	Power	Height	Input Voltage	CCT	Optics
Bridgelux / CREE	Ø 95 mm	18 W	100 mm	AC 220 V	3000	15° / 25° / 38° / 60°


Ceiling Light

Features

- Ultra Slim for more placements
- Fully Adjustable and Rotational allows a greater aiming flexibility
- Removable front ring gives the change of lens degree as desired
- Warm Dim Technology

PL-DS1075B

Cut-out
Ø 65mm




Ø65.0

LED	Diameter	Power	Height	Input Voltage	CCT	Optics
Bridgelux / CREE	Ø 74.5 mm	9 W	52 mm	DC36V 250mA	3000/4000/5000	18° / 24° / 36°

PL-DS1092B

Cut-out
Ø 76mm



Ø76.0

LED	Diameter	Power	Height	Input Voltage	CCT	Optics
Bridgelux / CREE	Ø 92.5 mm	13 W	58 mm	DC36V 350mA	3000/4000/5000	18° / 24° / 36°




Downlight

Features

- Series Product
- All parts removable, wide variations to be created with ease and fast
- Trimless kit / Driver box available
- Warm Dim Technology
- Custom color

PL-DM4070D




Ø60.0

Cut-out
Ø 60mm

LED	Diameter	Power	Height	Input Voltage	CCT	Optics
Bridgelux / CREE	Ø 70 mm	9 W	88 mm	DC 36V 250mA	3000 / 4000 / 5000	18° / 25° / 35°

PL-DM5093D




Ø60.0

Cut-out
Ø 60mm

LED	Diameter	Power	Height	Input Voltage	CCT	Optics
Bridgelux / CREE	Ø 70 mm	13 W	88 mm	DC 36V 250mA	3000 / 4000 / 5000	15° / 25° / 38° / 60°

PL-DM5125D




Ø105.0

Cut-out
Ø 105mm

LED	Diameter	Power	Height	Input Voltage	CCT	Optics
Bridgelux / CREE	Ø 125 mm	18 W	112 mm	DC 36V 250mA	3000 / 4000 / 5000	15° / 25° / 38° / 60°

PL-DM5070S




Ø63x63

Cut-out
Ø 63mm

LED	Power	Input Voltage	CCT	Optics
Bridgelux / CREE	9 W	DC 36 V 25mA	3000 / 4000 / 5000	15° / 25° / 38° / 60°

PL-DM5105S



Ø98x98


Cut-out
Ø 98mm

LED	Power	Input Voltage	CCT	Optics
Bridgelux / CREE	13 W	DC 36 V 35mA	3000 / 4000 / 5000	15° / 25° / 38° / 60°

PL-DL111A

Features

- Miniature Downlight
- Interchangeable frames brings the wide variations
- IP65 rated
- Warm Dim Technology



LED	Power	Input Voltage	CCT	Optics
Bridgelux / CREE	2 W	DC 3 V 700mA	3000 / 4000 / 5000	15° / 25° / 30° / 40° / 60°



► Headquarters

光鼎電子股份有限公司
Para Light Electronics Co., Ltd.

新北市中和區建康路8號11樓
11F, No. 8, Jiankang Rd., Zhonghe Dist. New Taipei City, 23586 Taiwan
T+886-2-2225-3733
F+886-2-2225-4800
para@para.com.tw
www.para.com.tw

► Factory

連雲港光鼎電子有限公司
Para Light Lianyungang Electronics Co., Ltd.

中國江蘇省連雲港市灌南線經濟開發區威海路8號
No.8, Wei Hai Rd., Guannan Economics Deveopment Zone,
Lianyungang City, Jiangsu Province, 223500, China
T+86-518-8369-2888
F+86-518-8369-2899
para@para.com.tw

南京華鼎電子有限公司
Para Light Nanjing Electronics Co., Ltd.

中國江蘇省南京市江寧區湯山街湯泉西路1號
No.1, Tanguan W. Rd., Tangshan Ave., Jianning Dist. Nanjing City,
Jiansu Province, 211131 China
T+86-25-8410-7685
F+86-25-8410-7684

緬甸光鼎電子有限公司(仰光)
Para Light Yangon Electronics Co., Ltd. (Myanmar)

No. 212, Pyin Si Minthar Gyi Street, Shwe Lin Ban Industry,
Hlaing Thar Yar Township, Yangon, Myanmar
T+95-9776964540
susie@parahk.com
www.para.com.tw

► America

美國光鼎分公司
Para Light Corp. USA

515 Spanish Lane, Suite B, Walnut, CA 91789
T+909-468-4866
F+909-468-4876
sales@paralightusa.com
www.paralightusa.com

► India

印度光鼎分公司
Para Light India Pvt. Ltd.

No.979, 9th Floor, Aggarwal Cyber Plaza-2,
Netaji Subhash Place, Pitampura, New Delhi- 110034, India
T+011-41086226
abhinav.jha@para.com.tw

► Greater China-Sales Team

North China : Beijing, Qingdao
East China : Shanghai, Ningbo, Suzhou, Nanjing, Hefei, Wuhan, Zhengzhou
South: Shenzhen, Xiamen, Jiangmen
Central : Chengdu

蘇州光鼎電子有限公司 East China
Para Light (SUZHOU) Electronics Co., Ltd.

蘇州新區獅山路199號新地中心2104室
Room 2104, Xindi Center Building, No.199, Shishan Road
Suzhou City, Jiangsu Province, 215011 China
T+86-133-6527-0527
F+86-512-6809-7669
jeremy@para-lyg.com.cn

光鼎深圳實業有限公司 South China
Para Light (SHENZHEN) Electronics Co., Ltd.

中國深圳市龍華區龍觀東路57號尚美時代大廈1310-1312室
Room 1310-1312, Shangmei Times Building, No.57,
Longguan East Road, Longhua Dist., Shenzhen City,
Guangdong Province, 518110 China
T+86-189-2747-1103
eddy@paralight.com.cn

青島光鼎電子有限公司
Para Light (QINGDAO) Electronics Co., Ltd.

山東省青島市市北區山東路168號時代國際廣場12樓1204室
Room 1204, 12th Floor, Times International Plaza,
No.168 Shandong Road, Shibei District, Qingdao City,
Shandong Province, 266000 China
T+0532-85692571 / 18626429477

光鼎北京辦事處 North China
Para Light (BEIJING) Sales Office

北京市海澱區清和中街橡樹灣二期
Qinghe street, oak bay Phase II building, Haiding District,
Beijing City, 100000 China
T+186-2642-9477 / 181-0107-7619
tianjin@paralight.com.cn

光鼎成都辦事處 Central China
Para Light (CHENGDU) Sales Office

四川省成都市金牛區金沙路169號-現代城1幢10層1008室
Room 1008, 10th Floor, No. 169 Xiandaicheng Building 1, Jinsha Road,
Jinniu District, Chengdu city, Sichuan Province, 610031 China
T+86-18360655305
yangfeiting@para-lyg.com.cn