



**PARA LIGHT ELECTRONICS CO., LTD.**

11F., No. 8, Jiankang Rd., Zhonghe Dist., New Taipei City 235, Taiwan,  
Tel: 886-2-2225-3733 Fax: 886-2-2225-4800  
E-mail: [para@para.com.tw](mailto:para@para.com.tw) <http://www.para.com.tw>

**DATA SHEET**

**PART NO.:LT670KGCT-UV-B-S3**

**REV: A/0**

CUSTOMER'S APPROVAL: \_\_\_\_\_

DCC: \_\_\_\_\_

DRAWING NO.:DS-31P-24-0001

DATE: 2024-01-05

Page

1

LD-R/E020

### • Features

- .Top view, wide view angle, black color PLCC-2 package.
- .Suitable for all SMT assembly and solder process.
- .High Luminous Intensity and high efficiency.
- .Moisture sensitivity level: Level 5a.
- .Available on tape and reel.
- .UV resistance.
- .RoHS compliant.
- .Pb-free.




**ATTENTION**  
OBSERVE PRECAUTIONS  
FOR HANDLING  
ELECTROSTATIC  
DISCHARGE  
SENSITIVE  
DEVICES

### • Applications

- .Optical indicator.
- .Outdoor or Indoor display.
- .Backlight for LCD, switch and symbol, display.
- .General use.

### • Package Dimensions

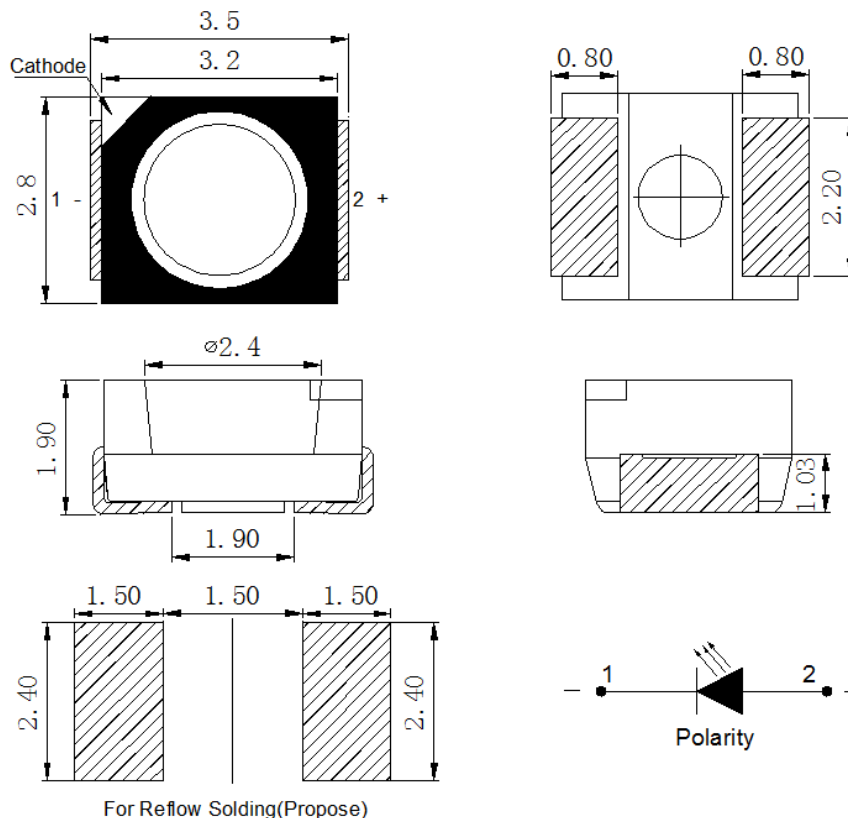

### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.254\text{mm}$  (0.01") unless otherwise specified.
3. Lead spacing is measured where the leads emerge from the package.
4. Specifications are subject to change with notice.
5. The colors of the lines are specified in the specification unless otherwise specified.



# SURFACE MOUNT DEVICE LED

LT670KGCT-UV-B-S3

REV:A/0

## Selection Guide

Dice	Lens Type	Luminous Intensity(mcd)@20mA		Viewing Angle 2θ1/2
		Min.	Max.	
Pure Green (InGaN)	Water Clear	1200	2100	120°

## • Electrical and optical characteristics(Ta=25°C)

Items	Symb	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	VF	IF =20mA	2.8	3.0	3.6	V
Reverse Current	IR	VR =5V	---	---	10	uA
Spectral Line Half-Width	Δλ	IF =20mA	---	30	---	nm
Dominant Wavelength	λd	IF =20mA	515	525	530	nm
Peak Wavelength	λp	IF =20mA	---	520	---	nm

- Notes: 1. Luminous flux is measured with a light sensor and filter combination that approximates the CIE eye-response curve.  
 2. θ1/2 is the off-axis angle at which the luminous intensity is half the axial luminous intensity.  
 3. The dominant wavelength, λd is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

## • Absolute Maximum Ratings At Ta=25°C

Items	Symbol	Absolute maximum Rating	Unit
Forward Current	IF	20	mA
Peak Forward Current*	IFP	80	mA
Reverse Voltage	VR	5	V
Power Dissipation	PD	72	mW
Electrostatic Discharge(HBM)	ESD	1500	V
Operating Temperature Range	Topr	-40°C ~ + 85°C	
Storage Temperature Range	Tstg	-40°C ~ +100°C	
Lead Soldering Temperature	Tsol	Reflow soldering : 260°C For 10 Seconds Hand soldering: 300°C For 3 Seconds	

Notes:

- 1.1/10 duty cycle, 0.1ms pulse width.
2. The above forward voltage measurement allowance tolerance is ±0.1V.
3. The above dominant wavelength measurement allowance tolerance is ±1.0nm.
4. The above luminous intensity measurement allowance tolerance is ±10%.

**•Typical electro-optical characteristics curves**

Fig.1 Relative Intensity vs. Wavelength

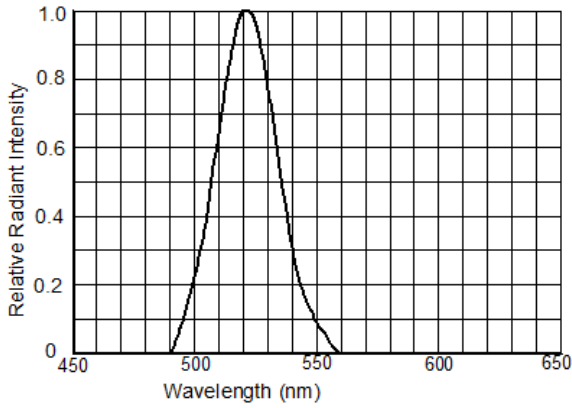


Fig.2 Forward Current vs. Ambient Temperature

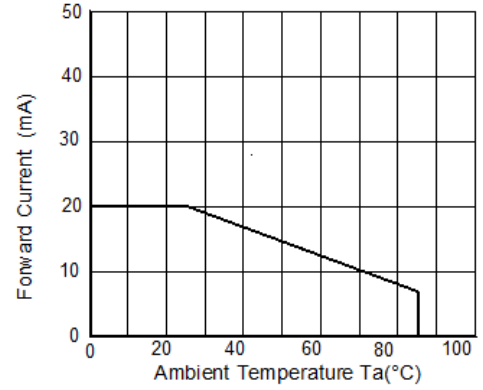


Fig.3 Forward Current vs. Forward Voltage

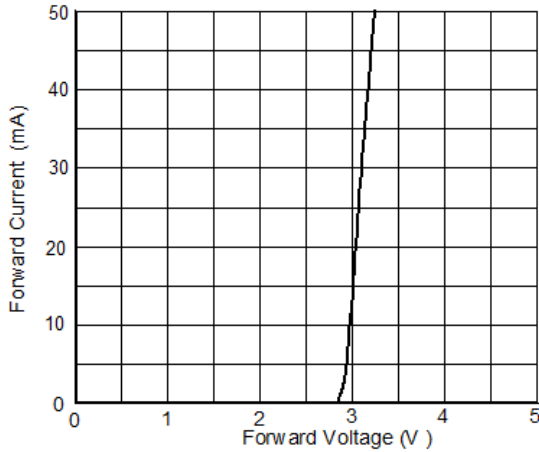


Fig.4 Relative Luminous Intensity vs. Ambient Temperature

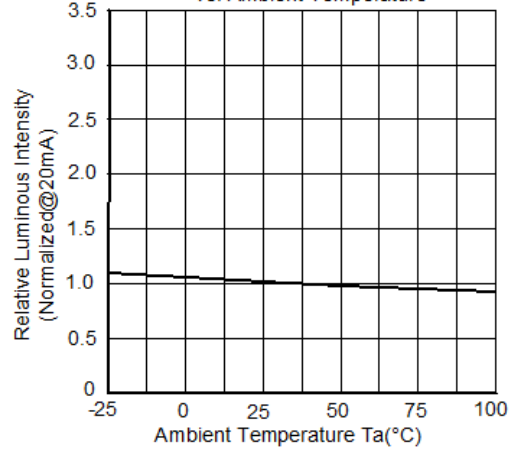


Fig.5 Relative Radiant Intensity vs. Forward Current


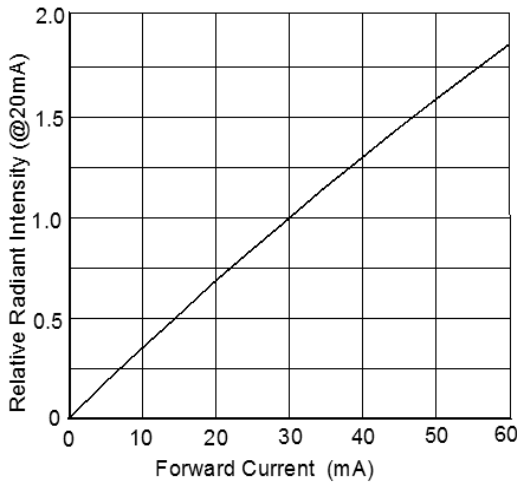


Fig.6 Radiation Diagram (Ta=25°C)



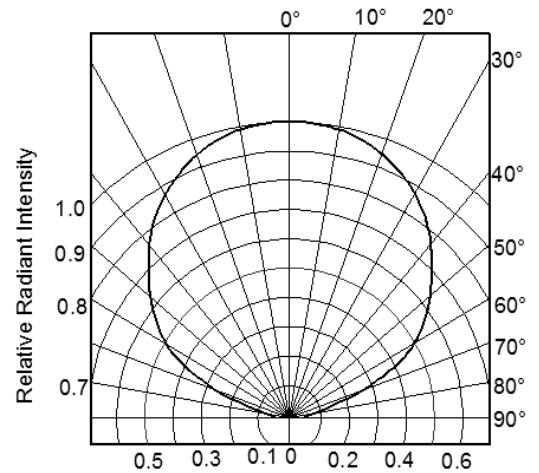

# SURFACE MOUNT DEVICE LED

LT670KGCT-UV-B-S3

REV:A/0

## • Bin Code List

Forward Voltage(VF) @IF=20mA			Unit: V
Bin Code	Min.	Max.	
V10	2.8	3.0	
V11	3.0	3.2	
V12	3.2	3.4	
V13	3.4	3.6	

Note: Tolerance for each Forward Voltage Bin is  $\pm 0.05V$ .

Luminous Intensity(Iv) @IF=20mA			Unit: mcd
Bin Code	Min.	Max.	
L12	1200	1500	
L13	1500	1800	
L14	1800	2100	

Note: Tolerance for each Luminous Intensity Bin is  $\pm 10\%$ .

Dominant Wavelength( $\lambda_d$ ) IF=20mA			Unit: nm
Bin Code	Min.	Max.	
G07	515.0	517.5	
G08	517.5	520.0	
G09	520.0	522.5	
G10	522.5	525.0	
G11	525.0	527.5	
G12	527.5	530.0	

Note: Tolerance for each Dominant Wavelength Bin is  $\pm 1.0nm$ .



# SURFACE MOUNT DEVICE LED

LT670KGCT-UV-B-S3

REV:A/0

## ●Reliability Test Items and Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%.

LTPD : 10%.

Items	Test Condition	Test Hours/Cycles	Quantity	Ac/Re
Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	3times	22 PCS	0/1
Temperature Cycle	H : +85°C 30min. ┆ 5 min L : -40°C 30min.	300 Cycles	22PCS	0/1
Thermal Shock	H : +100°C 10min. ┆ 10 sec L : -40°C 10min.	100Cycles	22PCS	0/1
High Temperature Storage	Temp. : 100°C	1000Hrs	22PCS	0/1
Low Temperature Storage	Temp. : -40°C	1000Hrs	22PCS	0/1
Dc Life	IF =20mA	1000Hrs	22PCS	0/1
High Temperature / High Humidity	85°C/ 85%RH	500Hrs	22PCS	0/1


## Failure Criteria

Test Items	Symbol	Test condition	Failure Criteria	
			Min.	Max.
Forward Voltage	VF	IF =20mA	---	(U.S.L*)x1.1
Reverse Current	IR	VR=5V	---	(U.S.L*)x2.0
Luminous Intensity	IV	IF =20mA	(L.S.L*)x0.7	---


Notes:

1. U.S.L means the upper limit of specified characteristics.
2. Measurement shall be taken between 2 hours and after the test pieces have been returned normal ambient conditions after completion of each test.

### ● Packaging

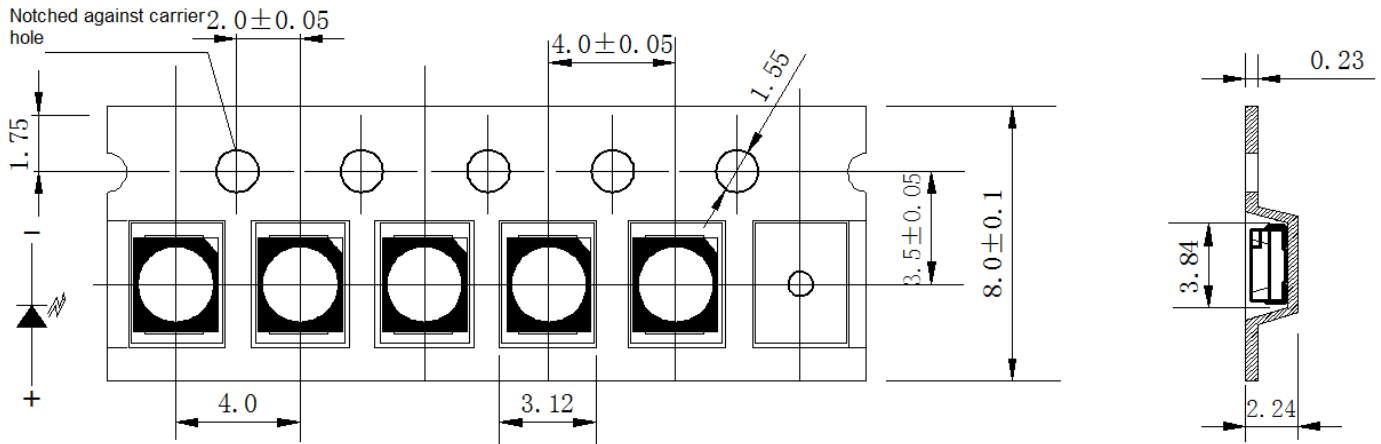


Note: Tolerance unless mentioned is  $\pm 0.1\text{mm}$ ; Unit = mm

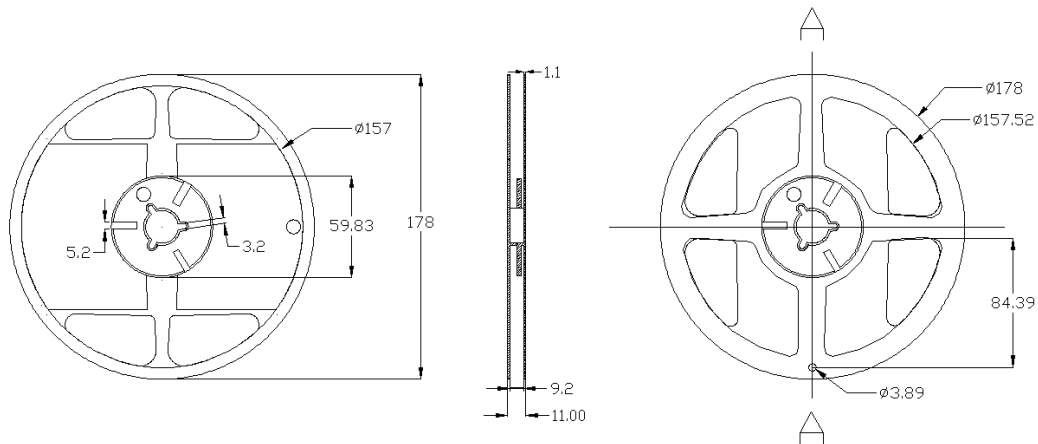

Carrier Tape Dimensions: Loaded Quantity 2000 pcs Per Reel.


### ● Moisture Resistant Packaging

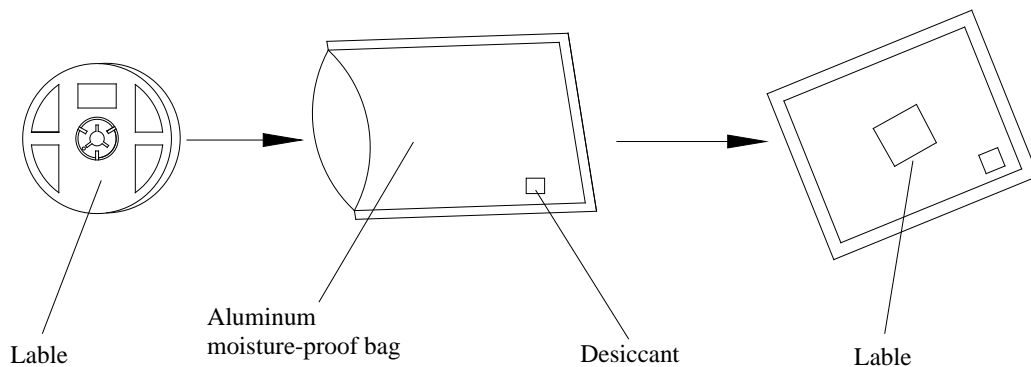


### • Precautions for Use

#### • SMT Reflow Soldering Instructions

<Pb-free solder>

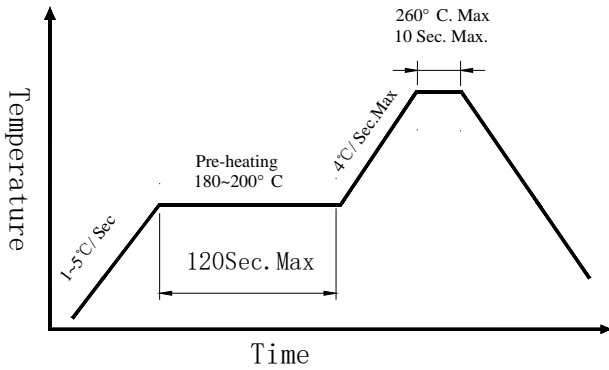

<Lead solder>

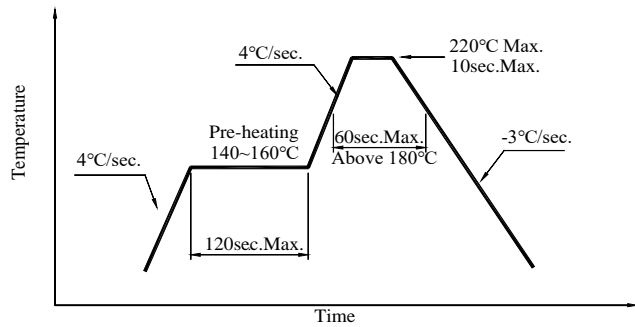


- 1.Reflow soldering should not be done more than two times
- 2.When soldering, do not put stress on the LEDs during heating

#### • Soldering Iron

1. When hand soldering, keep the temperature of iron below less 300°C less than 3 seconds.
2. The hand solder should be done only one time.

#### • Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure).It should be confirmed in advance whether the characteristics of LEDs will or will not be damaged by repairing.

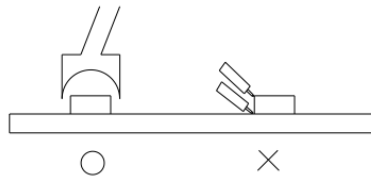


### • Cautions


#### Application

1. A LED is a current-operated device. The slight shift of voltage will cause big change of current, which will damage LEDs. Customer should use resistors in series for the Over-Current-Proof.
2. In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended to use individual resistor separately, as shown in Circuit A below.  
The brightness of each LED shown in Circuit B might appear difference due to the differences in the I-V characteristics of those LEDs.





**Circuit model A**




**Circuit model B**

High temperature may reduce LEDs' intensity and other performances, so keeping it away from heat source to get good performance is necessary.


### Handling Precautions

Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although its characteristic significantly reduces thermal stress, it is more prone to damage by external mechanical force. As a result, special handling precautions must be observed during assembling using silicone encapsulated LED products. Failure to comply might leads to damage and premature failure of the LED.


1. handle the component along the side surface by using forceps or appropriate tools, do not directly touch or handle the silicone lens surface, it may damage the internal circuitry.

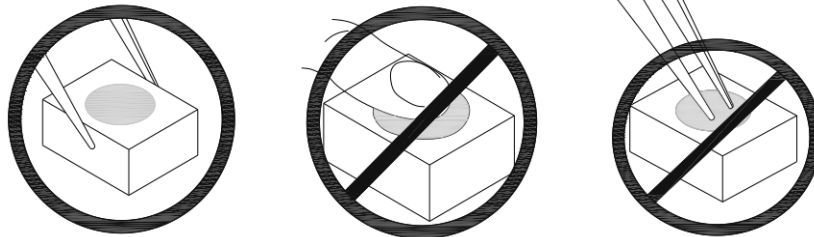

2. The outer diameter of the SMD pickup nozzle should not exceed the size of the LED to prevent air leaks. The inner diameter of the nozzle should be as large as possible. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup. The dimensions of the component must be accurately programmed in the pick-and- place machine to insure precise pickup and avoid damage during production.



3. Do not stack together assembled PCBs containing LEDs. Impact may scratch the silicon lens or damage the internal circuitry.



4. Not suitable to operate in acidic environment, PH<7.



**Storage**

1. Before opening the original package, it is recommended to store it in the following environment: temperature: 5 °C ~ 30 °C / humidity: maximum relative humidity: 60%.
2. After opening original package, the storage ambient for the LEDs should be in 5~30°C temperature and 60% or less relative humidity.
3. In order to avoid moisture absorption, it is recommended that the LEDs that out of the original package should be stored in a sealed container with appropriate desiccant, or in desiccators with nitrogen ambient.
4. The LEDs should be used within 24hrs (1 day) after opening the package. Once been mounted, soldering should be quick.
5. If the moisture absorbent material (silica gel) has faded away or the LEDs stored out of original package for more than 168hrs (7 days), baking treatment should be performed using the conditions: 65°C at least 48 hours.
6. Less than three months of the products must be baked at 65±5°C/48 hours after opening package before they can be produced.
7. More than three months of the products must be returned to our company for high temperature baking at 150°C/4 hours.

**ESD (Electrostatic Discharge )-Protection**

A LED (especially the Blue、 White and Green product) is an ESD sensitive component, and static electricity or power surge will damage the LED. ESD-damaged LEDs will exhibit abnormal characteristics such as high reverse leakage current, low forward voltage, or “no light-up” at low currents, etc.

Some advice as below should be noticed:



## SURFACE MOUNT DEVICE LED

LT670KGCT-UV-B-S3

REV:A/0

1. A conductive wrist strap or anti-electrostatic glove should be worn when handling these LEDs.
2. All devices, equipment, machinery, work tables and storage racks, etc. must be properly grounded.
3. Use anti-static package or boxes to carry and storage LEDs. And ordinary plastic package or boxes is forbidden to use.
4. Use ionizer to neutralize the static charge during handling or operating.
5. All surfaces and objects within 1 ft close to LEDs measure less than 100V.

### Cleaning

Use alcohol-based cleaning solvents such as IPA (isopropyl alcohol) to clean LEDs if necessary.

### Others

1. The LEDs described here are intended to be used for ordinary electronic equipment (such as office equipment, communication equipment and household applications).Consult light's Sales in advance for the applications in which exceptional reliability is required, particularly when the failure or malfunction of the LEDs may directly jeopardize life or health. ( such as in aviation, transportation, traffic control equipment, medical and life support systems and safety devices).
2. The light output from the high luminous intensity LEDs may cause injury to human eyes when viewed directly.
3. The appearance and specifications of the product may be modified for improvement without prior notice.