

CONTACT US

PARA LIGHT ELECTRONICS CO., LTD



+886-2-2225-3733



+886-2-2225-4800



para@para.com.tw



11F, No. 8, Jiankang Rd., Zhonghe Dist.,
New Taipei City 23586, Taiwan



website




wechat



LED LAMP&HOLDER

Led Component

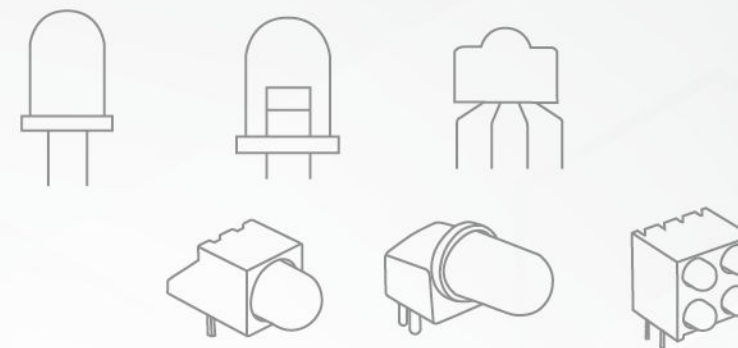

About Us

Chairman Mr. David Ma Capital USD 42 million
Established in 1987 No. of Employee 1073

Founded in 1987, PARA LIGHT is now a global innovator and leader in visible and invisible LED fields. With two manufacturing plants certified with ISO 14001, ISO 9001, IATF16969, and also complies with REACH and RoHS.



Contents

04 3mm

Tower
Single Color

Round
Single Color
Dual Color

12 5mm

Round
Single Color
Dual Color
RGB

20 8mm

Round
Single Color


24 Rectangle

Rectangle
Single Color
Dual Color
RGB

30 Tapping

36 Holder

Single Level
Dual Level
Tri Level
Four Level
Multiple

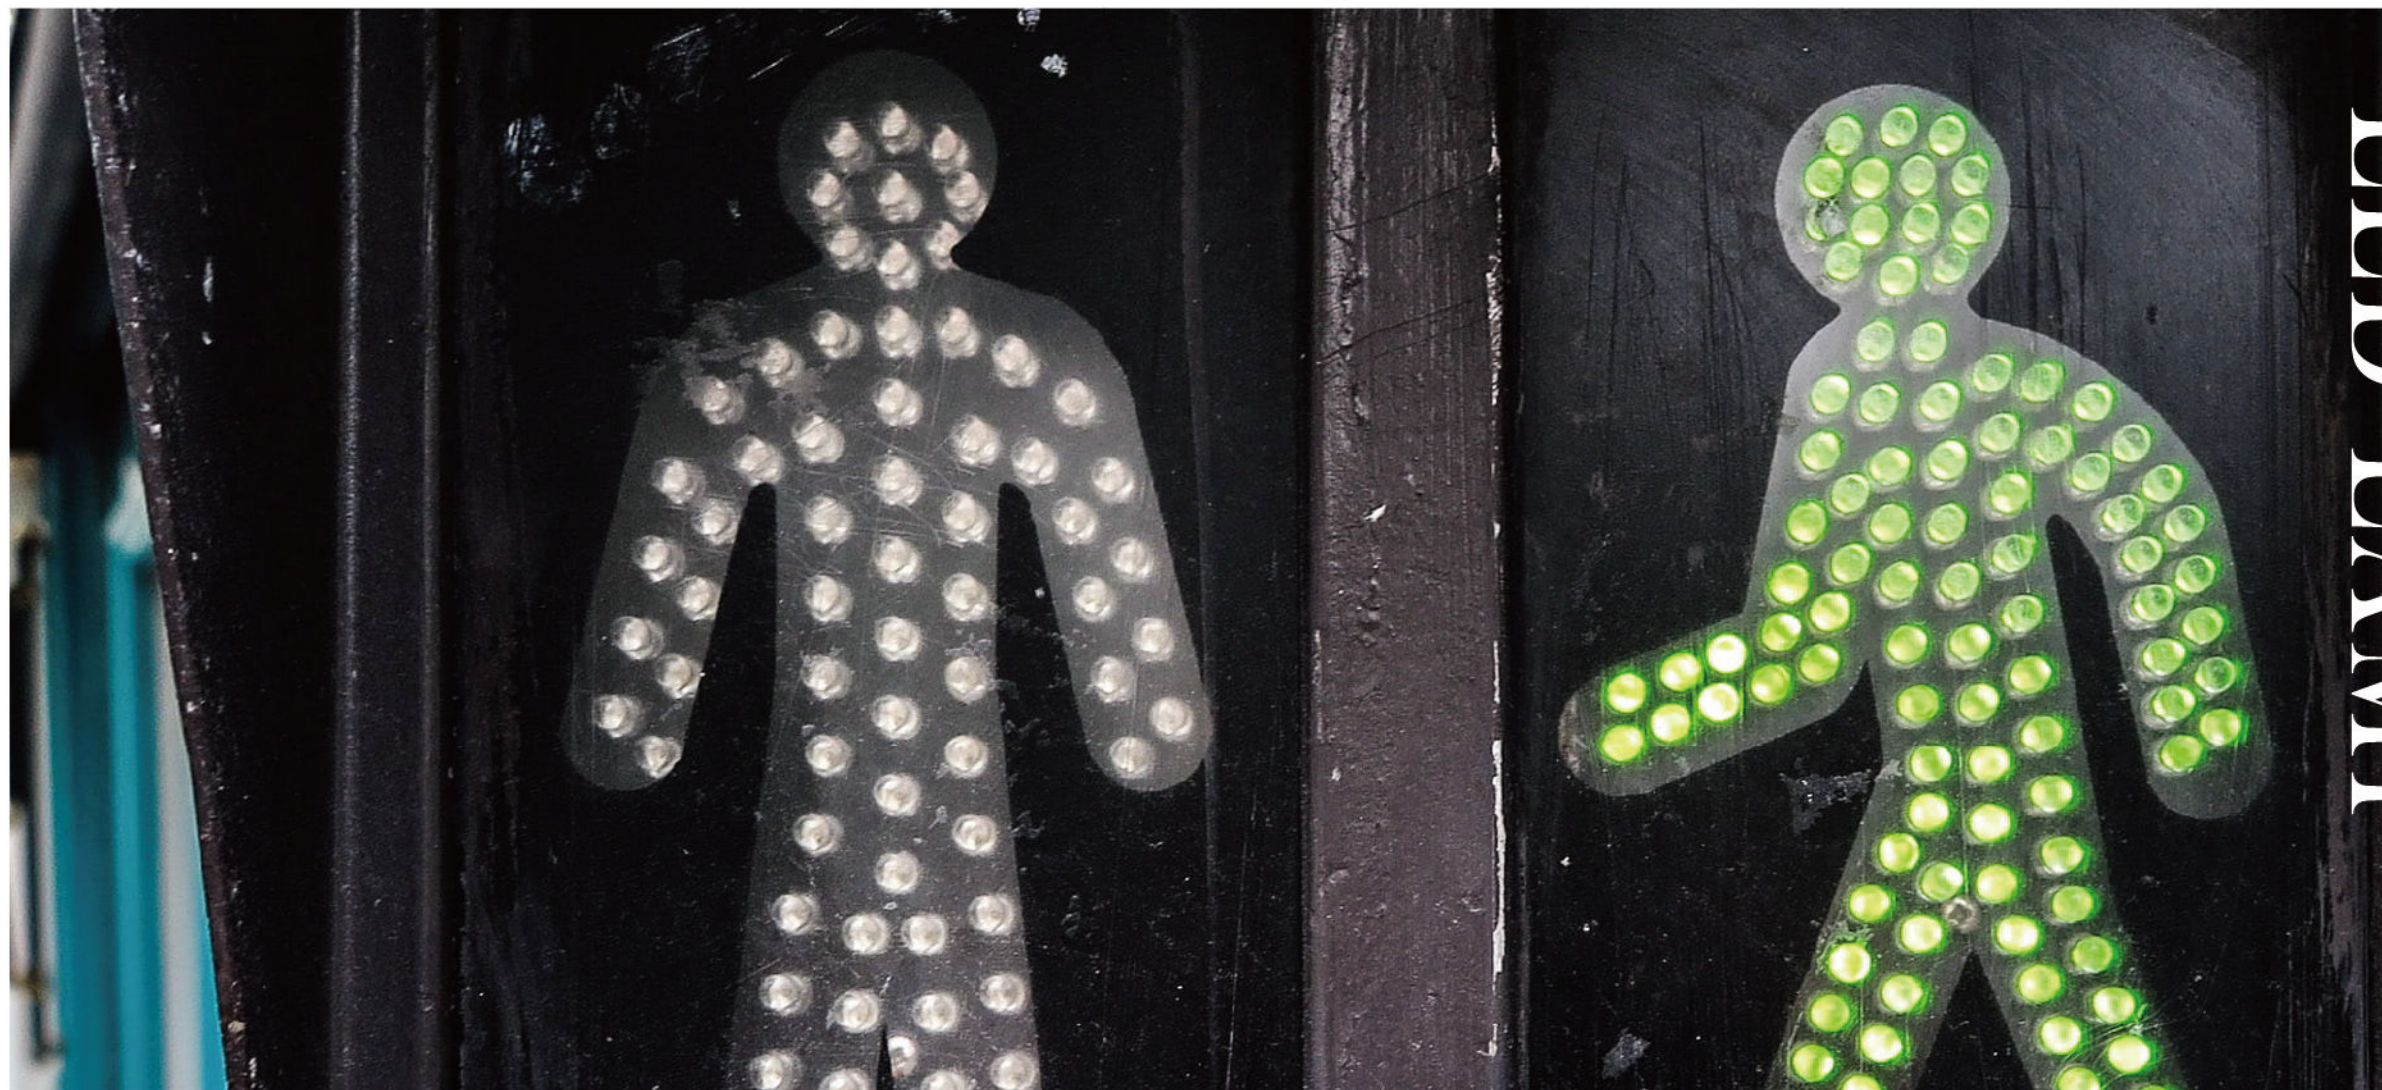



LED LAMP

3mm

Through Hole Lamp

APPLICATIONS


- ◆Indicator ◆Signboard
- ◆IoT server ◆Home appliance
- ◆RJ45 Indicator

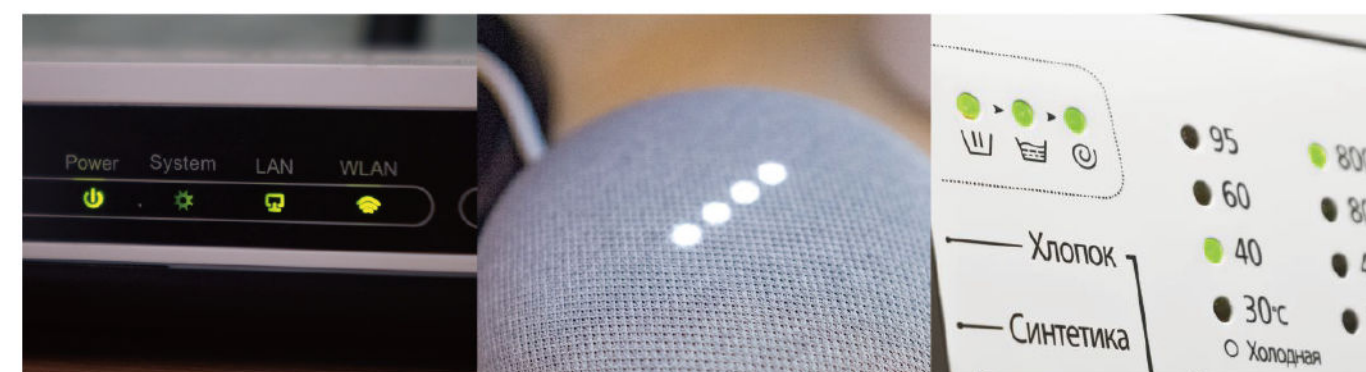

3mm Tower Single Color

L204

Outline Dimensions 1.8 mm

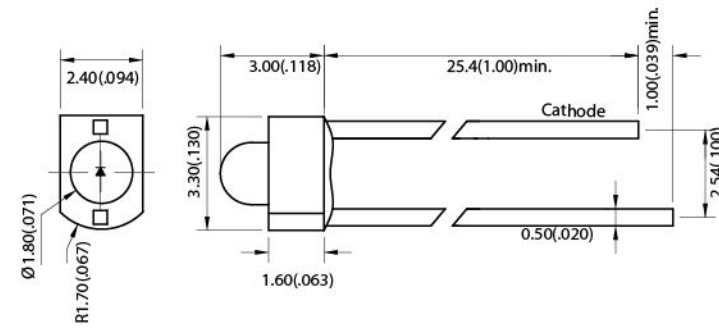


Part No.	Ref. PN	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
L204G	LOR2GD078G	Yellow Green	570	Green Diffused	15	60	1.9	20
L204Y	LVR2YD005G	Yellow	587	Yellow Diffused	12	60	2.1	20
L204SR	LVR2SRD006G	Hyper Red	645	Red Diffused	100	60	1.9	20
L204LPG6	LRR2LPG6D117G	Green	522	Green Diffused	3000	100	3.0	20

3mm Round Single Color

L304


Outline Dimensions 3 mm

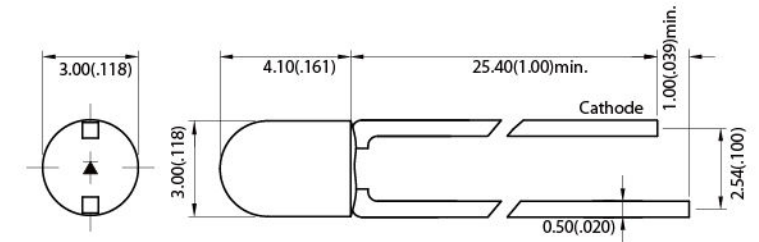

Part No.	Ref. PN	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
L304G	LQR3GD333G	Yellow Green	570	Green Diffused	18	110	1.9	20
L304Y	LVR3YD007G	Yellow	587	Yellow Diffused	25	110	2.1	20
L304E	LQR3ED334G	Super Red	622	Red Diffused	25	110	1.9	20
L304UB5	LQR3UB5D313G	Blue	462	Blue Diffused	240	100	3.0	20

L314


Outline Dimensions 3 mm

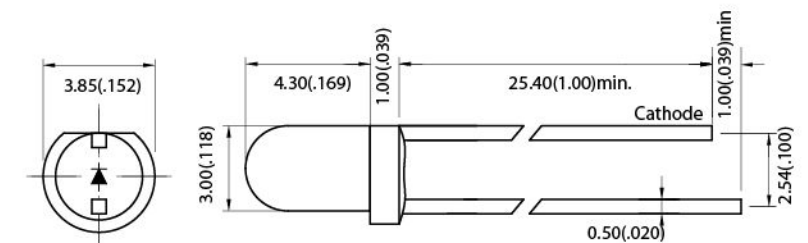

Part No.	Ref. PN	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
L314G	LLR3GD334G	Yellow Green	570	Green Diffused	20	60	1.9	20
L314E	LLR3ED199G	Super Red	630	Red Diffused	20	60	1.9	20
L314SR	LRR3SRC176G	Hyper Red	640	Water clear	115	60	1.9	20
L314UB5	LRR3UB5D224G	Blue	470	Blue Diffused	600	60	3.0	20
L314UW5	LOR3UW5C090G	White	(0.29, 0.30)	Water clear	7000	20	3.1	20

L354


Outline Dimensions 3 mm

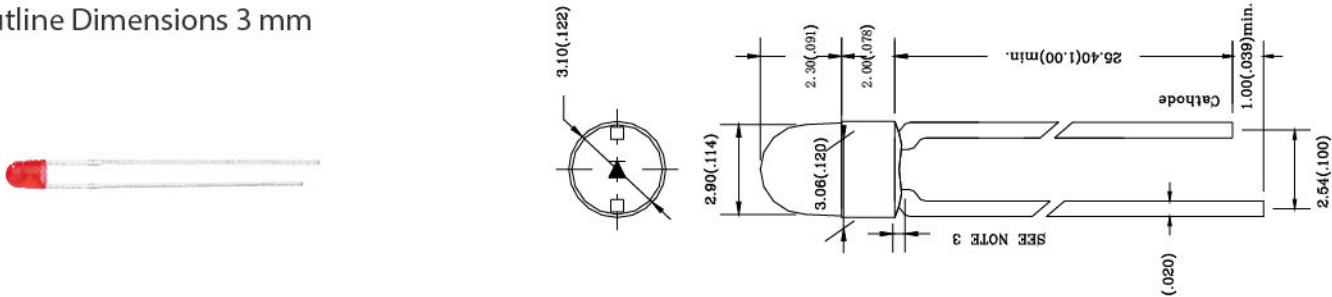

Part No.	Ref. PN	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
L354G	LPR3GD217G	Yellow Green	570	Green Diffused	20	60	1.9	20
L354Y	LVR3YD008G	Yellow	587	Yellow Diffused	15	60	2.1	20
L354E	LVR3ED009G	Red	622	Red Diffused	40	60	1.9	20
L354UB5	LKR3UB5D008G	Blue	470	Blue Diffused	450	60	3.0	20
L354LPG6	LVR3LPG6C010G	Green	525	Water clear	4000	40	3.2	20
L354UW5	LVR3UW5W011G	White	(0.30 , 0.30)	White Diffused	800	80	3.0	20

L3U4


Outline Dimensions 3 mm

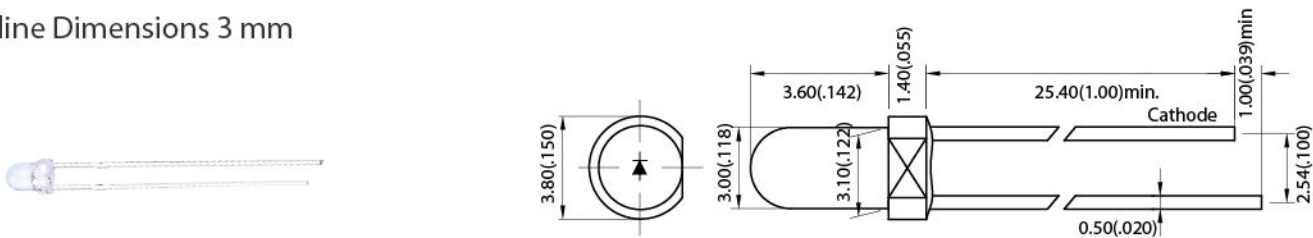

Part No.	Ref. PN	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
L3U4G	LOR3GD071G	Yellow Green	570	Green Diffused	20	60	1.9	20
L3U4Y	LOR3YD185G	Yellow	590	Yellow Diffused	88	60	2.0	20
L3U4E	LVR3ED016G	Super Red	622	Red Diffused	25	60	1.9	20
L3U4SR	LQR3SRD320G	Hyper Red	638	Red Diffused	50	60	1.9	20
L3U4UB5	LQR3UB5D292G	Blue	466	Blue Diffused	80	60	3.0	20
L3U4LPG6	LJR3LPG6C290	Green	525	Water Clear	4500	25	3.0	20
L3U4UW5	LUR3UW5W097GA	White	(0.30 , 0.32)	White Diffused	3200	30	2.8	20

L334


Outline Dimensions 3 mm

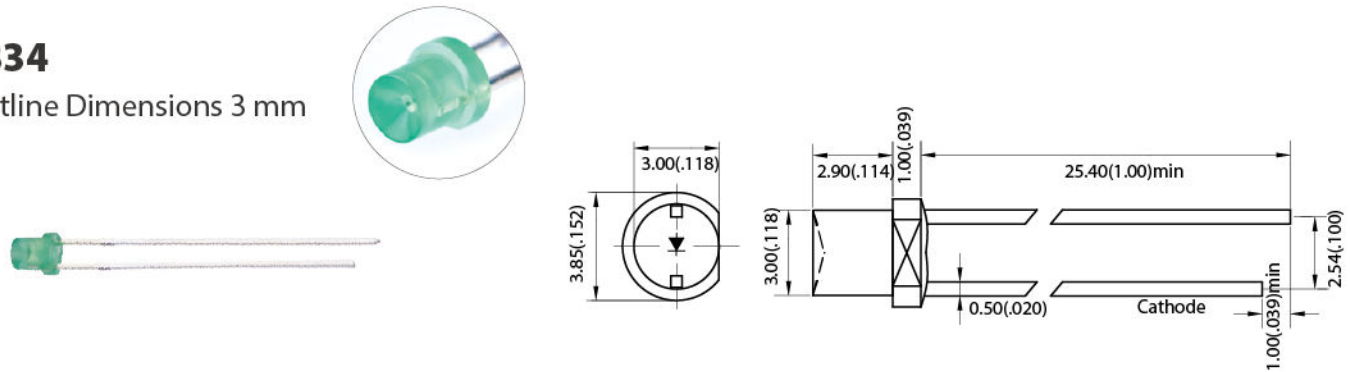

Part No.	Ref. PN	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
L334G	LJR3GD332	Yellow Green	570	Green Diffused	12	150	1.9	20
L334Y	LJR3VY5C251	Yellow	590	Water Clear	300	120	1.9	20
L334E	LUR3VEXC070G	Super Red	620	Water Clear	250	150	2.1	20
L334UB5	LNR3UB5C012G	Blue	470	Water Clear	280	120	3.0	20
L334LPG6	LVR3LPG6C029G	Green	520	Water Clear	600	115	3.0	20
L334UW5	LQR3UW5C288G	White	(0.27, 0.25)	Water Clear	290	130	3.2	20

L3N4

Outline Dimensions 3 mm

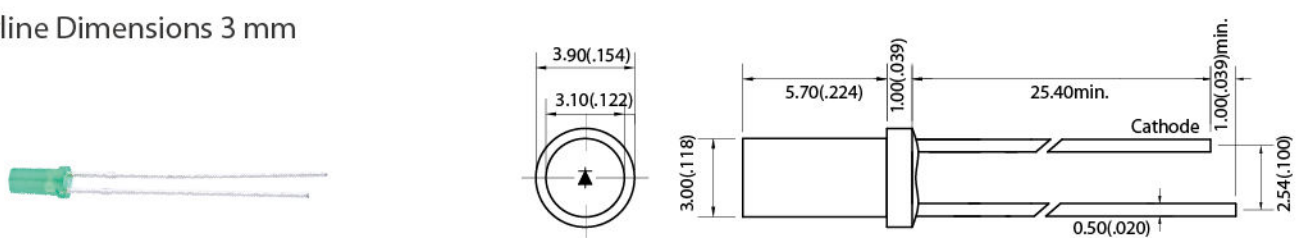


Part No.	Ref. PN	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
L3N4G	LNR3GD137G	Yellow Green	570	Green Diffused	6	150	1.9	20
L3N4Y	LPR3YC051G	Yellow	586	Yellow Diffused	20	60	2.1	20
L3N4SR	LPR3SRC053G	Hyper Red	636	Water Clear	55	40	2.1	20
L3N4UB5	LLR3UB5D012G	Blue	465	Blue Diffused	360	150	3.0	20

3mm Tower Single Color

L6V4


Outline Dimensions 3 mm

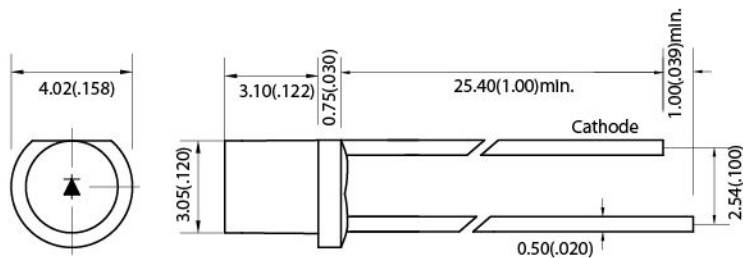

Part No.	Ref. PN	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_f (V)	Forward Current I_f (mA)
L6V4G	LLR3VG3T207G	Yellow Green	570	GREEN TRANSPARENT	50	110	2.1	20
L6V4Y	LQR3LY4C037G	Yellow	590	Water Clear	160	140	1.9	20
L6V4E	LQR3LESC038G	Super Red	620	Water Clear	150	140	2.0	20
L6V4UB5	LRR3UB5D219G	Blue	465	Blue Diffused	220	110	3.0	20
L6V4UW5	LQR3UW5C036G	White	(0.27,0.26)	White Diffused	700	140	3.0	20

L319

Outline Dimensions 3 mm

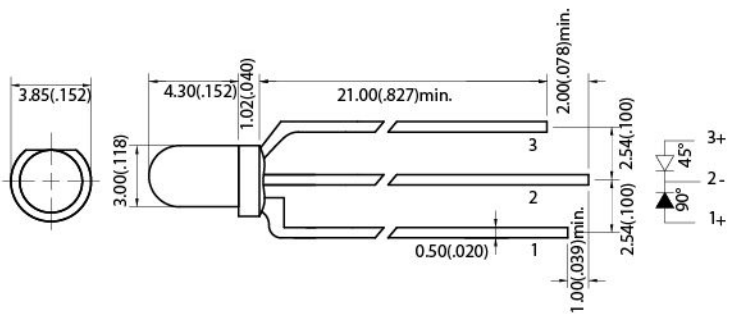


Part No.	Ref. PN	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_f (V)	Forward Current I_f (mA)
L319GE	LPR3GEW010G	Yellow Green	570	White Diffused	2.5	35	1.9	20
L319Y	LSR3YGW187G	Orange	603	White Diffused	2.5	35	2.1	20
L319YG	LSR3YGW187G	Yellow	587	White Diffused	2	60	2.1	20
L319SG	LUR3SRGW027G	Yellow Green	571	White Diffused	3	60	1.9	20
L319SRG	LUR3SRGW027G	Super Red	642	White Diffused	20	60	1.9	20
L319RUB5	LPR3VEXUB5W179G	Yellow Green	572	White Diffused	10	60	2.2	20
L319RUB5	LPR3VEXUB5W179G	Super Red	623	White Diffused	450	60	1.9	20
L319RUB5	LPR3VEXUB5W179G	Blue	463	White Diffused	180	60	3.0	20
L319RLPG6	LTR3HURLPG6C292G	Super Red	629	Water Clear	150	80	1.8	5
L319RLPG6	LTR3HURLPG6C292G	Green	530	Water Clear	2000	80	2.6	5

3mm Round Dual Color

L317

Outline Dimensions 3 mm

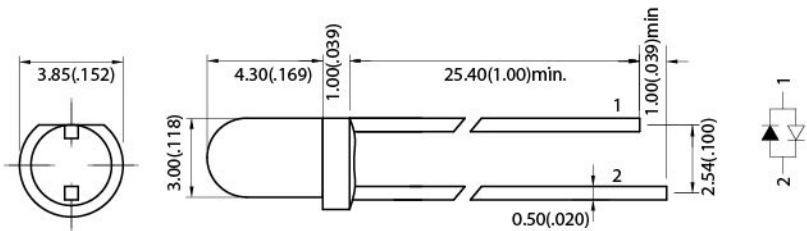

Part No.	Ref. PN	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_f (V)	Forward Current I_f (mA)
L317YG	LTR3YGW004G	Yellow	587	White Diffused	5	60	2.1	20
L317EG	LJR3EGW010	Yellow Green	570	White Diffused	12	40	1.9	20
L317EG	LJR3EGW010	Super Red	622	White Diffused	90	40	1.9	20
L317SRG	LOR3SRVG3W006G	Yellow Green	570	White Diffused	50	110	1.9	20
L317SRG	LOR3SRVG3W006G	Hyper Red	640	White Diffused	20	110	1.9	20
L317UB5R	LHR3UB5HURW251	Yellow Green	570	White Diffused	18	110	1.9	20
L317UB5R	LHR3UB5HURW251	Blue	470	White Diffused	750	60	3.0	20
L317UB5R	LHR3UB5HURW251	Red	633	White Diffused	200	60	2.0	20





LED LAMP

5mm
Through Hole Lamp

APPLICATIONS


- ◆Indicator ◆Signboard
- ◆IoT server ◆Home appliance
- ◆RJ45 Indicator

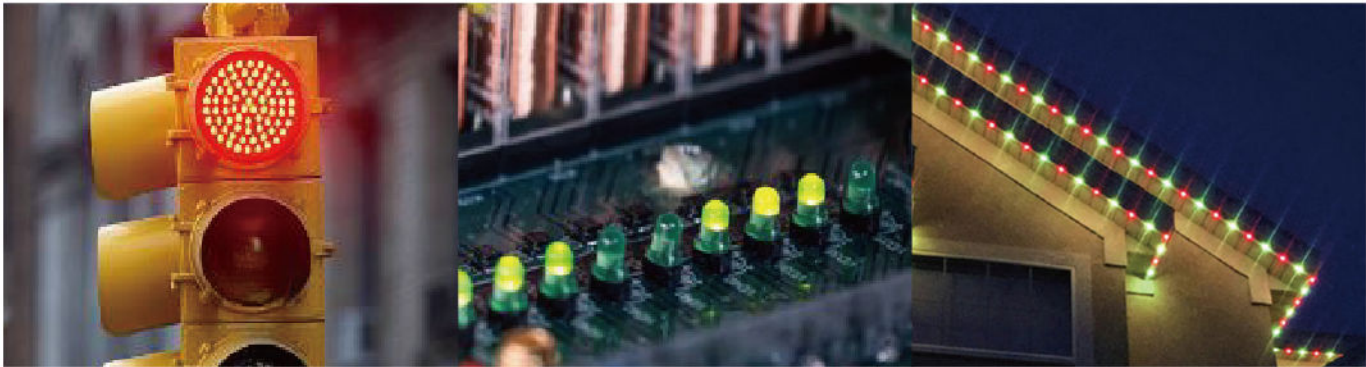

5mm Round Single Color

L523


Outline Dimensions 5 mm

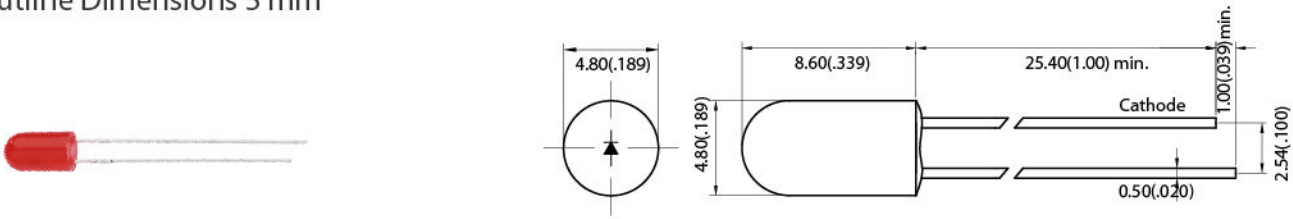

Part No.	Ref. PN	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
L523G	LVR5GD042G	Yellow Green	570	Green Diffused	14	110	2.0	20
L523Y	LVR5YD045G	Yellow	587	Yellow Diffused	15	110	2.1	20
L523E	LVR5ED044G	Super Red	622	Red Diffused	30	110	2.1	20
L523VY	LPR5VYAD443G	Yellow	590	Yellow Diffused	3500	25	2.0	20

L5T47


Outline Dimensions 5 mm

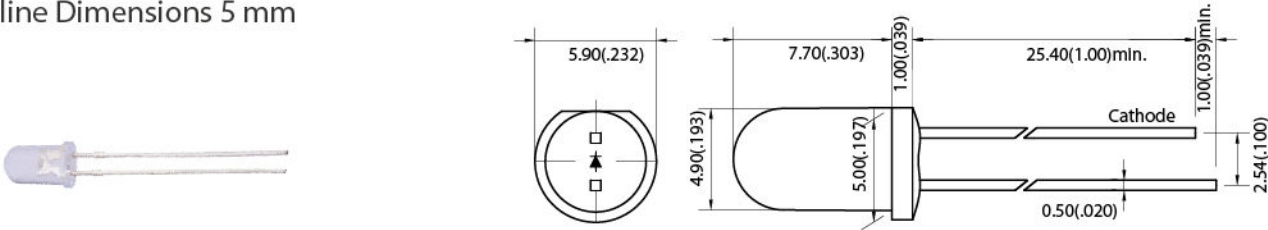

Part No.	Ref. PN	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
L5T47VEA	LLR5VEAC183G	Red	621	Water clear	5600	40	2.0	20
L5T47VYA	LQR5VYAC136G	Yellow	589	Water clear	16000	10	2.1	20
L5T47UB5	LQR5UB5C084G	Blue	465	Water clear	4000	20	3.0	20
L5T47LPG6	LQR5LPG6C422G	Green	530	Water clear	7000	30	2.9	20
L5T47UW5	LQR5UW5C621G -BIC	White	(0.29, 0.30)	Water clear	10000	10	3.0	30

L503


Outline Dimensions 5 mm

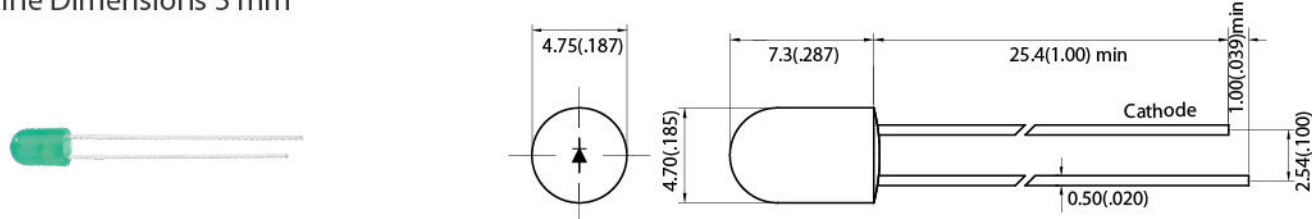

Part No.	Ref. PN	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
L503G	LVR5GD041G	Yellow Green	570	Green Diffused	20	110	2.0	20
L503E	LVR5ED040G	Super Red	622	Red Diffused	25	110	2.0	20
L503Y	LVR5YD043G	Yellow	587	Yellow Diffused	15	110	2.1	20

L513


Outline Dimensions 5 mm

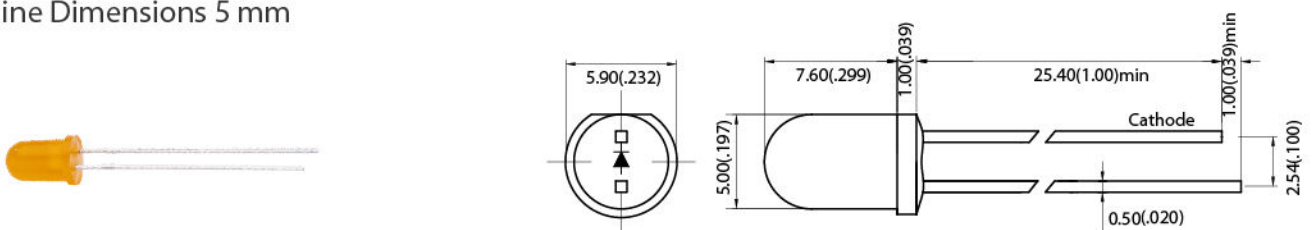

Part No.	Ref. PN	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
L513G	LMR5GD188G	Yellow Green	570	Green Diffused	80	120	1.9	20
L513Y	LMR5YD205G	Yellow	589	Yellow Diffused	50	110	1.9	20
L513E	LLR5ED221G	Super Red	622	Red Diffused	10	110	1.9	20
L513UB5	LSR5UB5C094G	Blue	464	Water Clear	5000	20	3	20
L513LPG6	LOR5LPG6C119G	Green	525	Water Clear	6000	25	3	20
L513UW5	LOR5UW5C039G	White	(0.29 , 0.30)	Water Clear	4000	30	3	20

L5P47


Outline Dimensions 5 mm

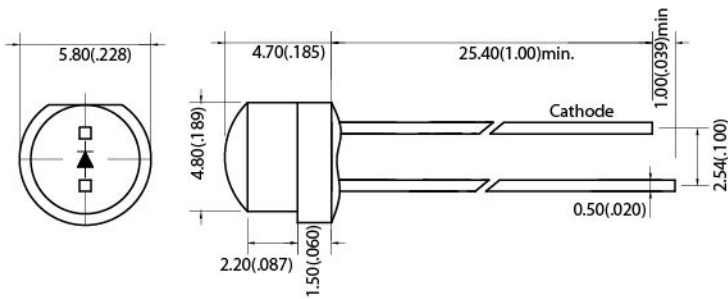

Part No.	Ref. PN	Color	Wavelength λd(nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I _v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V _F (V)	Forward Current I _F (mA)
L5P47VE	LUR5VEAC112G	Red	620	Water clear	1650	90	2.0	20
L5P47VY	LUR5VYXC034G	Yellow	594	Water clear	1300	100	2.1	20
L5P47UB5	LUR5UB5C101G	Blue	482	Water clear	900	90	2.9	20
L5P47LPG6	LPR5LPG6C073G	Green	521	Water clear	1200	75	3	20
L5P47UW5	LSR5UW5C222G	White	(0.27, 0.26)	Water clear	1000	90	3	15

L553


Outline Dimensions 5 mm

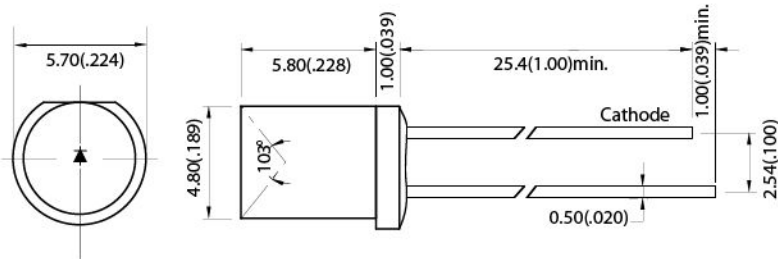

Part No.	Ref. PN	Color	Wavelength λd(nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I _v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V _F (V)	Forward Current I _F (mA)
L553G	LPR5VG3D225G	Yellow Green	570	Green Diffused	10	110	1.9	20
L553Y	LPR5LY1D226G	Yellow	589	Yellow Diffused	10	110	1.9	20
L553E	LPR5LR1D224G	Super Red	628	Red Diffused	10	110	1.9	20
L553UB5	LVR5UB5C031G	Blue	460	Water Clear	400	30	3.0	20
L553LPG6	LVR5LPG6C030G	Green	525	Water Clear	350	120	3.0	20
L553UW5	LQR5UW5C285G	White	(0.27, 0.25)	Water Clear	180	150	3.0	20

L5N3

Outline Dimensions 5 mm

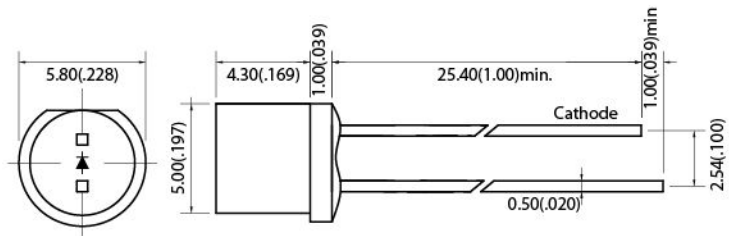


Part No.	Ref. PN	Color	Wavelength λd(nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I _v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V _F (V)	Forward Current I _F (mA)
L5N3G	LSR5GW240G	Yellow Green	573	White Diffused	10	140	1.9	20
L5N3Y	LQR5VYAC159G	Yellow	590	Water Clear	850	85	1.9	20
L5N3SR	LTR5SRW075G	Hyper Red	638	White Diffused	25	140	1.9	20
L5N3UB5	LOR5UB5C111G	Blue	465	Water Clear	4000	80	3.0	20
L5N3LPG6	LSR5LPG6D241G	Green	523	Green Diffused	900	140	3.1	20
L5N3UW5	LRR5UW5C193G	White	(0.28, 0.27)	White Diffused	1000	100	3.0	20

5mm Round Dual Color


L517

Outline Dimensions 5 mm

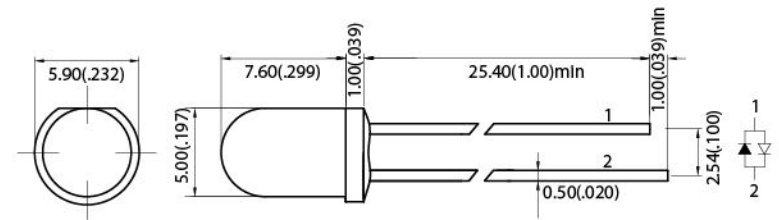

Part No.	Ref. PN	Color	Wavelength λd(nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I _v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V _F (V)	Forward Current I _F (mA)
L517GG	LTR5GGD142G	Yellow Green	570	Green Diffused	4	60	1.9	20
L517GY	LHR5GY063	Yellow Green Yellow	570 587	Yellow Diffused	50 60	60	1.9	20
L517EG	LJR5EGW025G	Super Red Yellow Green	628 570	White Diffused	10 12	100	1.9	20
L517EY	LPR5EYW501G	Super Red Yellow	632 585	White Diffused	15 10	120	1.9	20


L519
Outline Dimensions 5 mm

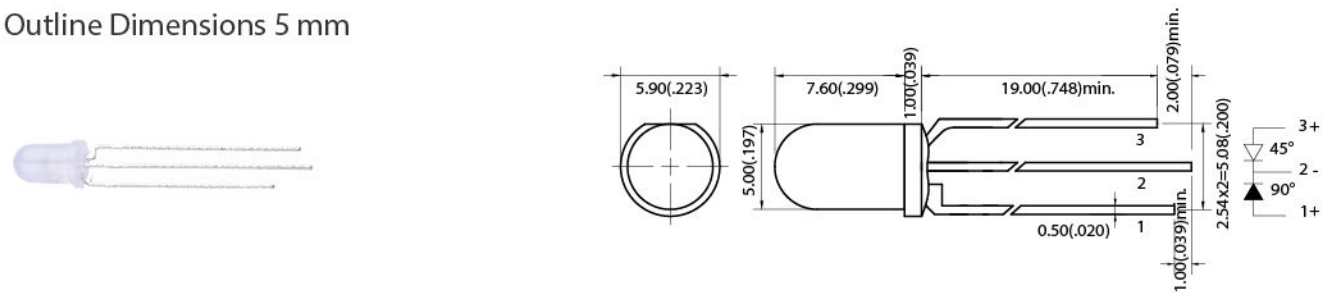

Part No.	Ref. PN	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_f (V)	Forward Current I_f (mA)
L519GY	LOR5GYC364G	Yellow Green	569	Water Clear	60	20	1.9	20
		Yellow	584		35		2.1	
L519EG	LQR5EGW594G	Super Red	618	White Diffused	20	80	2.1	20
		Yellow Green	570		25		2.2	
L519RLPG6	LTR5VEALPG6W171G	Super Red	620	White Diffused	290	110	2.1	20
		Green	525		920		2.8	

5mm Round RGB

L5T8
Outline Dimensions 5 mm

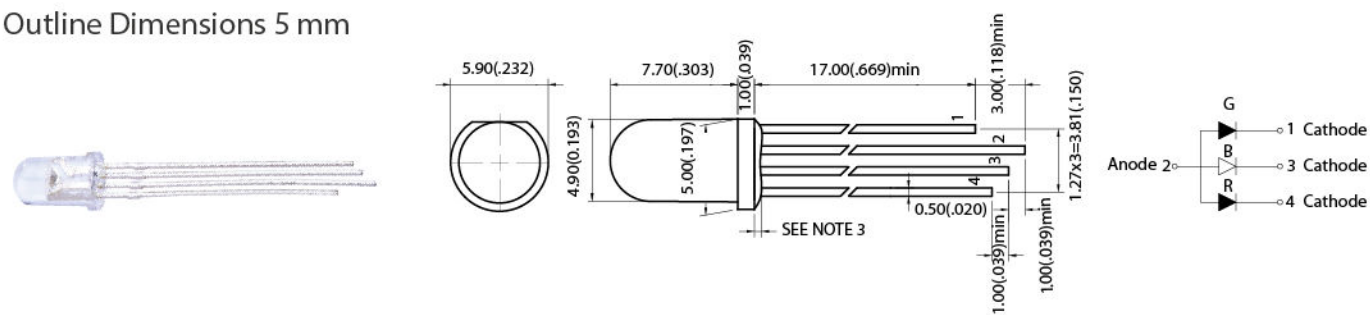

Part No.	Ref. PN	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_f (V)	Forward Current I_f (mA)
L5T8RGB	LQR5RGBW418G	Red	628	White Diffused	600	70	2.0	20
		Green	525		1500		2.8	
		Blue	460		300		2.9	






LED LAMP

8mm

Through Hole Lamp

APPLICATIONS


- ◆Indicator ◆Signboard
- ◆IoT server ◆Home appliance
- ◆RJ45 Indicator



8mm Round Single Color

L813


Outline Dimensions 8 mm

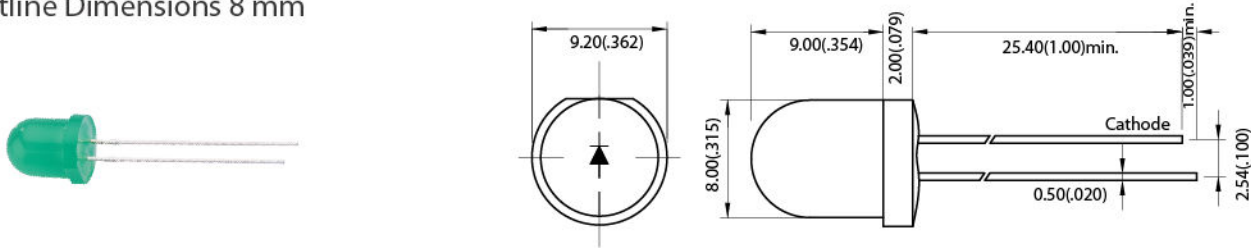

Part No.	Ref. PN	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
L813G	LKR8VG3D551	Yellow Green	570	Green Diffused	30	150	2.0	20
L813Y	LVR8YD018G	Yellow	590	Yellow Diffused	3	150	1.9	20
L813E	LRR8VED252G	Super Red	622	Red Diffused	700	40	1.9	20
L813UB5	LVR8UB5D019G	Blue	458	Blue Diffused	1000	35	3.1	20
L813LPG6	LRR8LPG6D251G	Green	522	Green Diffused	700	60	3.0	20
L813UW5	LTR8UW5C097G	White	(0.29 , 0.30)	Water Clear	5000	25	3.1	20

L833

Outline Dimensions 10 mm

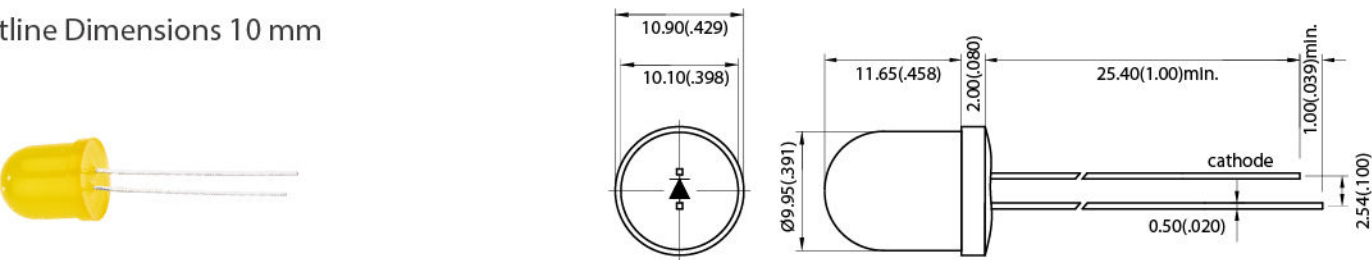

Part No.	Ref. PN	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
L833G	LVR10GD022G	Yellow Green	570	Green Diffused	5	150	1.9	20
L833Y	LQR8LY1D057G	Yellow	589	Yellow Diffused	50	150	1.9	20
L833E	LVR10ED023G	Super Red	622	Red Diffused	10	150	2.1	20
L833SR	LVR10SRD024G	Hyper Red	645	Red Diffused	15	150	2.1	20
L833UB5	LLR8UB5W059G	Blue	465	White	60	170	3.0	20
L833UW5	LPR10UW5C081G	White	(0.41 , 0.39)	White Diffused	2000	30	3.0	20






LED LAMP

Rectangle

Through Hole Lamp

APPLICATIONS


- ◆Indicator ◆Signboard
- ◆IoT server ◆Home appliance
- ◆RJ45 Indicator



Rectangle Single Color

L403


Outline Dimensions 2 x 5 x 7 mm

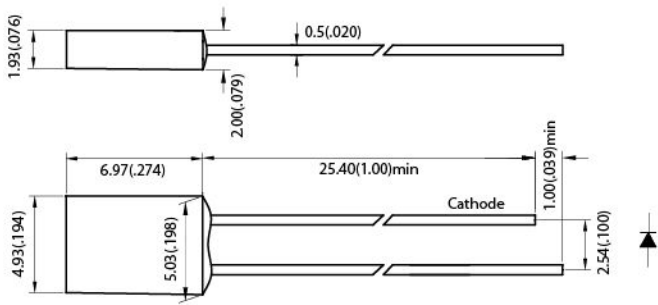

Part No.	Ref. PN	Color	Wavelength λ (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
L403G	LTS5GD005G	Yellow Green	570	Green Diffused	20	60	2.1	20
L403Y	LMS5YD181G	Yellow	587	Yellow Diffused	26	150	1.9	20
L403E	LVS4ED034G	Super Red	635	Red Diffused	12	120	1.9	20
L403SR	LVS4SRD035G	Hyper Red	645	Red Diffused	40	120	1.9	20
L403UB5	LQS4UB5D491G	Blue	464	Blue Diffused	66	110	3.0	20
L403LPG6	LQS4LPG6D402G	Green	528	Green Diffused	230	110	3.0	20

L423


Outline Dimensions 2.5 x 7.0 x 7.5 mm

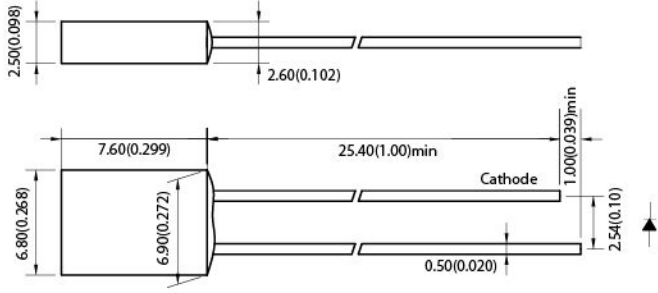

Part No.	Ref. PN	Color	Wavelength λ (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
L423G	LVS7GD038G	Yellow Green	570	Green Diffused	4	120	1.9	20
L423Y	LVS7VYD036G	Yellow	590	Yellow Diffused	50	80	2.0	20
L423E	LVS7ED039G	Super Red	623	Red Diffused	6	120	2.1	20
L423SR	LVS7SRD037G	Hyper Red	640	Red Diffused	11	80	1.9	20
L423UB5	LTS7UB5C103G	Blue	465	Water Clear	400	80	3.0	20
L423LPG6	LLS7LPG6D210G	Green	525	Green Diffused	175	150	3.0	20

L604

Outline Dimensions 1.9 x 3.1 x 4.0 mm


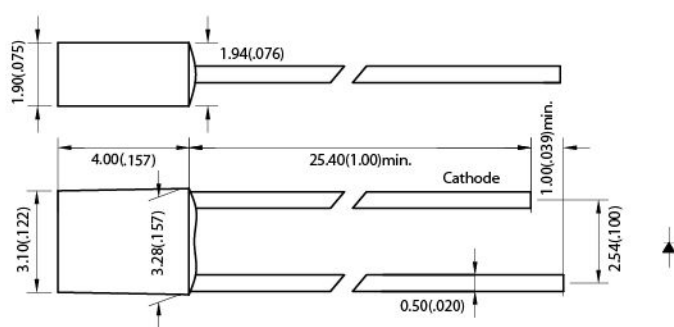


Part No.	Ref. PN	Color	Wavelength λ (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
L604G	LPS3GD127G	Yellow Green	569	Green Diffused	10	60	2.1	20
L604Y	LOS3LY3C188G	Yellow	589	Water Clear	70	60	2.1	20
L604E	LSS3VEC090G	Super Red	623	Water Clear	460	120	2.0	20
L604SR	LPS2SRT162G	Hyper Red	639	Red Transparent	50	40	1.9	20
L604UB5	LVS3UB5C049G	Blue	470	Water Clear	300	120	3.0	20
L604SR	LTS3LPG6T098G	Green	525	Green Transparent	300	120	3.0	20
L604UB5	LQS3UW5C336G	White	(0.30,0.30)	Water Clear	350	160	3.0	20

Rectangle Dual Color


L419

Outline Dimensions 2 x 5 x 7 mm

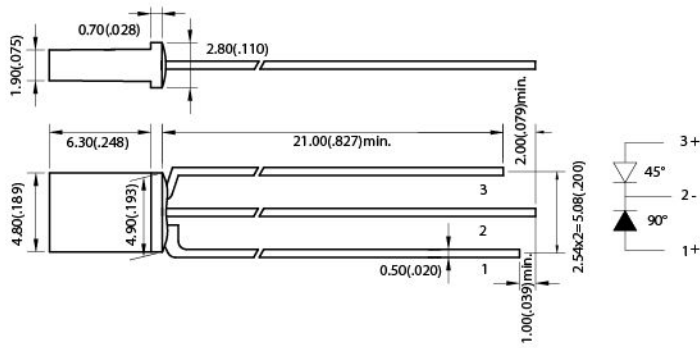


Part No.	Ref. PN	Color	Wavelength λ (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
L419YG	LRS4YGW263G	Yellow	590	White Diffused	5	120	2.1	20
L419EG	LPS4EGW030G	Yellow Green	572	White Diffused	5	170	1.9	20
L419RUB5	LRS6VEUB5W277G	Super Red	618	White Diffused	4	95	2.1	20
L419RUB5	LRS6VEUB5W277G	Yellow Green	569	White Diffused	5	95	1.2	20
L419RUB5	LRS6VEUB5W277G	Super Red	620	White Diffused	70	95	1.9	20
L419RUB5	LRS6VEUB5W277G	Blue	461	White Diffused	54	95	3.0	20
L419RUB5	LRS6VEUB5W277G	Super Red	627	White Diffused	50	120	1.9	20
L419RUB5	LRS6VEUB5W277G	Green	525	White Diffused	220	120	3.2	20

Outline Dimensions 2 x 5 x 7 mm

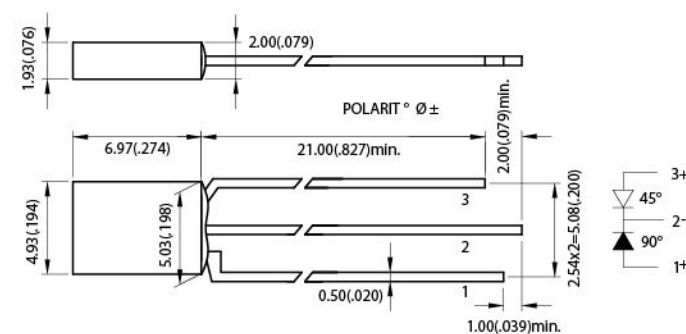

Rectangle RGB

Outline Dimensions 3.5 x 4.8 x 7.3 mm

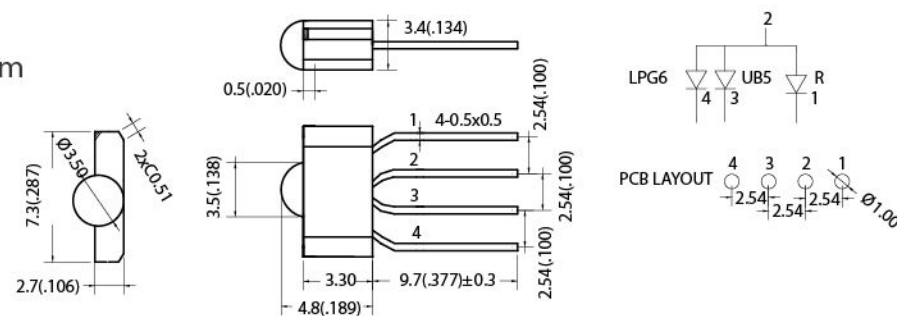

The image shows four white Wi-Fi smart switches installed in a rack. Each switch has a list of controlled devices and status LEDs. The switches are labeled as follows:

- Top Left Switch:**
 - Прихожая (Entrance hallway)
 - 1. Свет (Light)
 - 2. Теплый пол (Heated floor)
 - 3. Греющий кабель (Heating cable)
 - 4. Преднагрев воздуха (Preheating of air)
- Top Right Switch:**
 - СУ (SU - likely a typo for SU or a specific device)
 - 1. Розетки (Outlets)
 - 2. Теплый пол (Heated floor)
 - 3. Зеркало (Mirror)
 - 4. Полотенцесушитель (Towel rack)
- Bottom Left Switch:**
 - Комната (Room)
 - 1. Свет справа (Light on the right)
 - 2. Свет слева (Light on the left)
 - 3. Теплый пол (Heated floor)
 - 4. Розетки (верх) (Outlets (top))
- Bottom Right Switch:**
 - Комната (Room)
 - 1. Свет (СУ) (Light (SU))
 - 2. Розетки слева (Outlets on the left)
 - 3. Розетки справа (Outlets on the right)
 - 4. Розетки справа (в углу) (Outlets on the right (in the corner))

Each switch has a red LED indicator at the top and a blue LED indicator at the bottom. The switches are connected to a network of blue and brown cables.





LED LAMP

Tapping

Through Hole Lamp

APPLICATIONS


- ◆Indicator ◆Signboard
- ◆IoT server ◆Home appliance
- ◆RJ45 Indicator

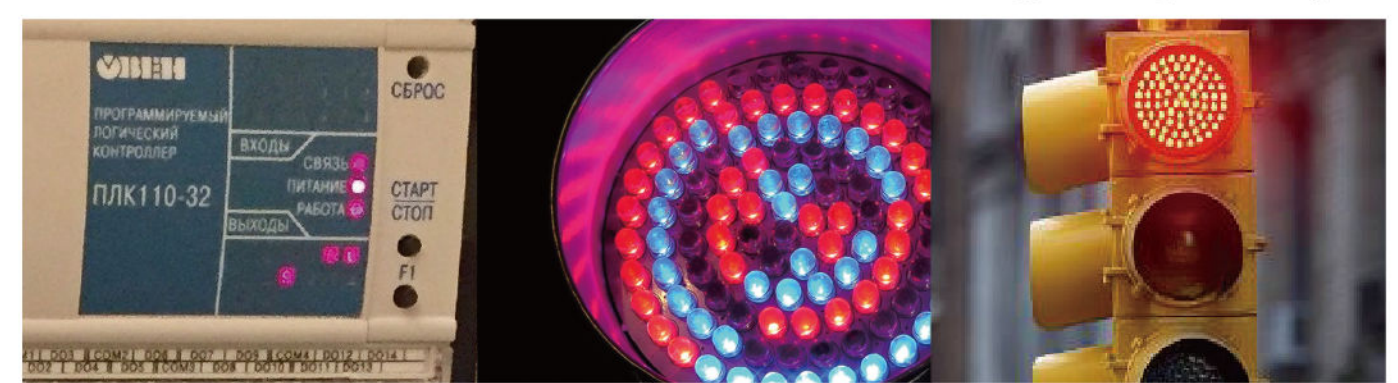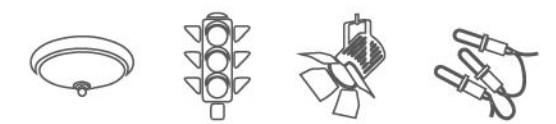

Tapping Single Color

L314 (TBSH)


Part No.	H
L314XX-TBS 180	18.0mm
L314XX-TBS 190	19.0mm
L314XX-TBS 200	20.0mm
L314XX-TBS 220	22.0mm
L314XX-TBS 240	24.0mm

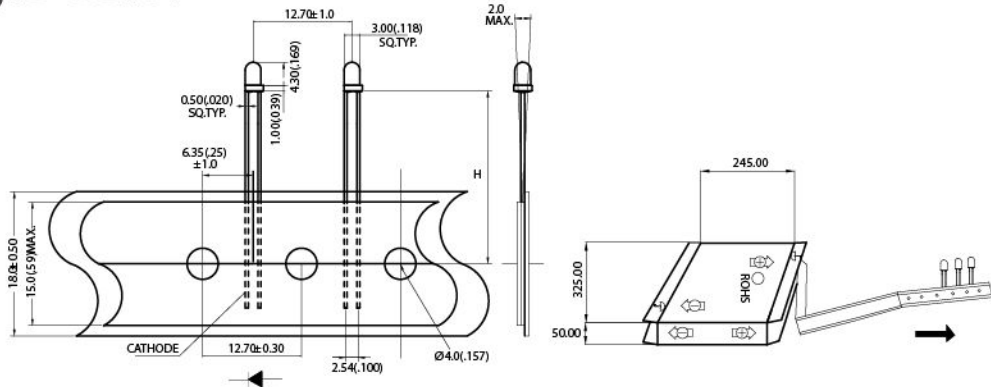

Part No.	Ref. PN	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_f (V)	Forward Current I_f (mA)
L314UB5C-TBSH	LJR3UB5C738	Blue	465	Water Clear	2000	20	3	20
L314LPG6C-TBSH	LJR3LPG6C983	Green	525	Water Clear	5000	20	3	20
L314GD-TBSH	LJR3GD742	Yellow Green	570	Green Diffused	30	60	1.9	20
L314YD-TBSH	LJR3YD741	Yellow	587	Yellow Diffused	20	60	2.1	20
L314ED-TBSH	LJR3ED740	Super Red	628	Red Diffused	30	60	1.9	20

L314 (TRSH)


Part No.	H
L314XX-TRS 180	18.0mm
L314XX-TRS 190	19.0mm
L314XX-TRS 200	20.0mm
L314XX-TRS 220	22.0mm
L314XX-TRS 240	24.0mm

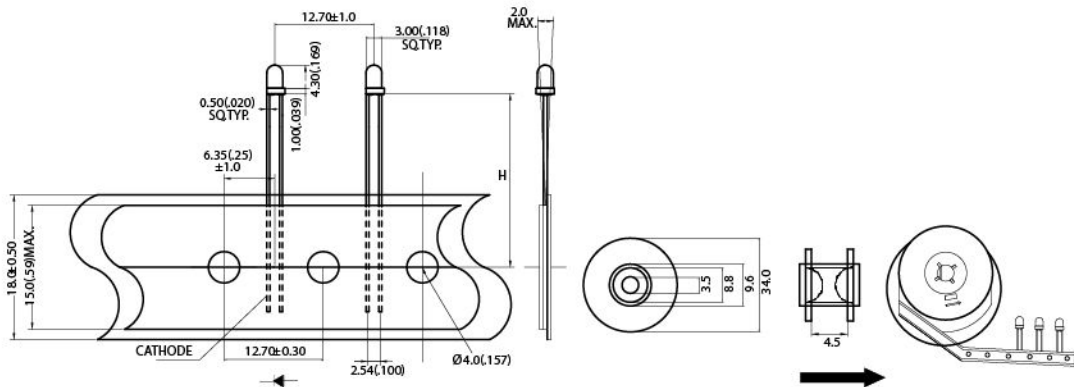

Part No.	Ref. PN	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_f (V)	Forward Current I_f (mA)
L314UB5C-TRSH	LJR3UB5C733	Blue	465	Water Clear	2000	20	3	20
L314LPG6C-TRSH	LJR3LPG6C738	Green	525	Water Clear	5000	20	3	20
L314GD-TRSH	LJR3GD737	Yellow Green	570	Green Diffused	30	60	1.9	20
L314YD-TRSH	LJR3YD736	Yellow	587	Yellow Diffused	20	60	2.1	20
L314ED-TRSH	LJR3ED735	Super Red	628	Red Diffused	30	60	1.9	20

L513 (TBSH)


Part No.	H
L-513XX-TBS 180	18.0mm
L-513XX-TBS 190	19.0mm
L-513XX-TBS 200	20.0mm
L-513XX-TBS 220	22.0mm
L-513XX-TBS 240	24.0mm

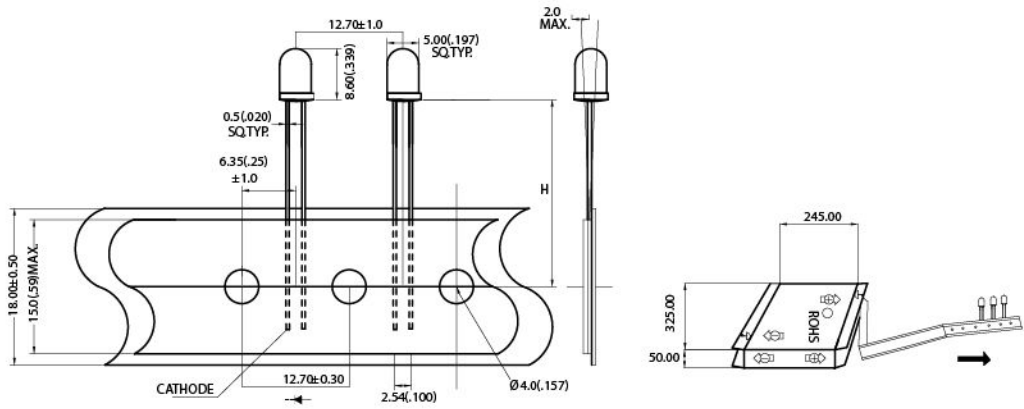

Part No.	Ref. PN	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_f (V)	Forward Current I_f (mA)
L-513GD-TBSH	LJR5GD731	Yellow Green	570	Green Diffused	20	110	2	20
L-513YD-TBSH	LJR5YD730	Yellow	587	Yellow Diffused	15	110	2.1	20
L-513ED-E610-TBSH	LJR5AD732	Super Amber	605	Orange Diffused	20	110	2.1	20
L-513ED-TBSH	LJR5ED729	Super Red	628	Red Diffused	20	110	2.1	20
L-513SRD-TBSH	LJR5SRD728	Hyper Red	640	Red Diffused	40	110	1.8	20

L513 (TRSH)


Part No.	H
L-513XX-TRS 180	18.0mm
L-513XX-TRS 190	19.0mm
L-513XX-TRS 200	20.0mm
L-513XX-TRS 220	22.0mm
L-513XX-TRS 240	24.0mm

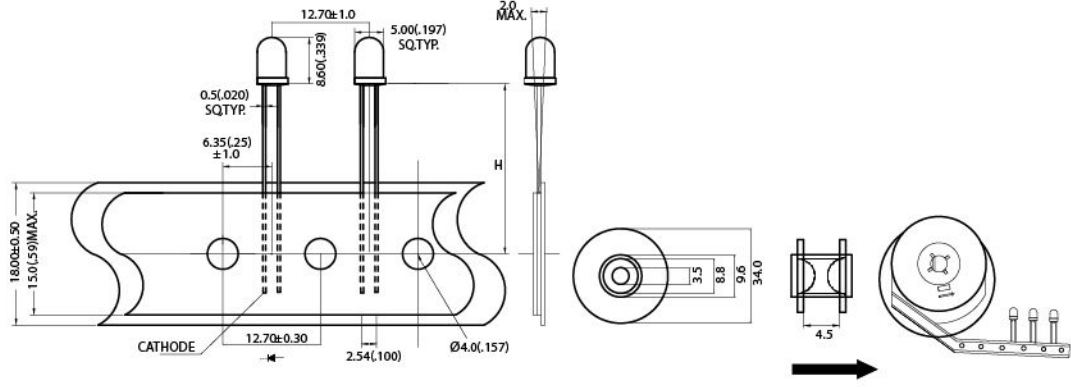

Part No.	Ref. PN	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_f (V)	Forward Current I_f (mA)
L-513UB5C-TRSH	LJR5GD726	Yellow Green	570	Green Diffused	28	60	1.9	20
L-513LPG6C-TRSH	LJR5YD725	Yellow	587	Yellow Diffused	35	60	2.1	20
L-513GD-TRSH	LJR5AD727	Super Amber	605	Orange Diffused	15	60	2.1	20
L-513YD-TRSH	LJR5ED724	Super Red	628	Red Diffused	30	60	1.9	20
L-513ED-TRSH	LJR5SRD723	Hyper Red	640	Red Diffused	40	60	1.9	20

L513 (TBFHJ)


Part No.	J
L-513XX-TBF 180A	3.0mm
L-513XX-TBF 190B	4.0mm
L-513XX-TBF 200C	5.0mm
L-513XX-TBF 220D	6.0mm
L-513XX-TBF 240E	7.0mm

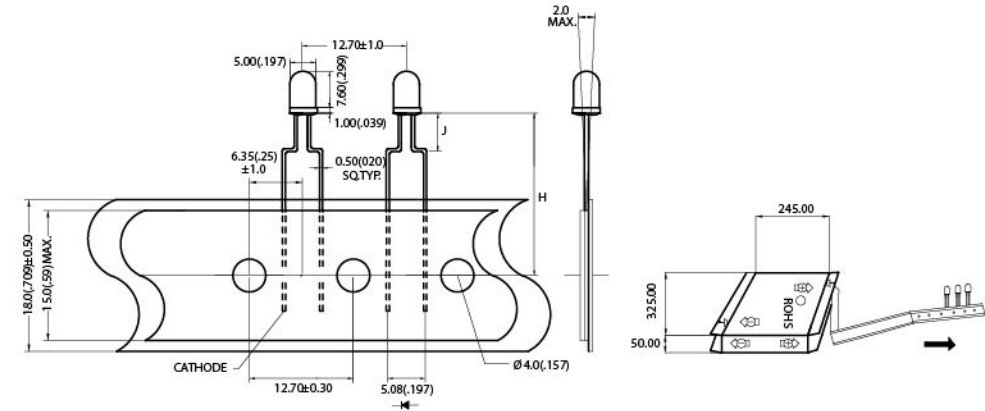

Part No.	Ref. PN	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_f (V)	Forward Current I_f (mA)
L-513GD-TBFHJ	LJR5GD721	Yellow Green	570	Green Diffused	28	60	1.9	20
L-513YD-TBFHJ	LJR5YD720	Yellow	587	Yellow Diffused	35	60	2.1	20
L-513AD-TBFHJ	LJR5AD722	Super Amber	605	Orange Diffused	15	60	2.1	20
L-513ED-TBFHJ	LJR5ED719	Super Red	628	Red Diffused	30	60	1.9	20
L-513SRD-TBFHJ	LJR5SRD718	Hyper Red	640	Red Diffused	40	60	1.8	20


L513 (TRFHJ)

Part No.	H	J
L-513XX-TRF 180A	18.0mm	3.0mm
L-513XX-TRF 190B	19.0mm	4.0mm
L-513XX-TRF 200C	20.0mm	5.0mm
L-513XX-TRF 220D	22.0mm	6.0mm
L-513XX-TRF 240E	24.0mm	7.0mm

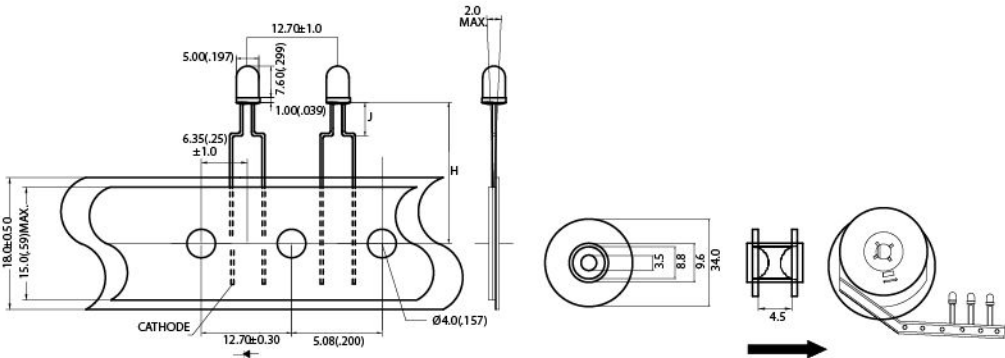

Part No.	Ref. PN	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_f (V)	Forward Current I_f (mA)
L-513GD-TRFHJ	LJR5GD716	Yellow Green	570	Green Diffused	28	60	2.0	20
L-513YD-TRFHJ	LJR5YD715	Yellow	587	Yellow Diffused	35	60	2.1	20
L-513AD-TRFHJ	LJR5AD717	Super Amber	605	Orange Diffused	15	60	2.1	20
L-513ED-TRFHJ	LJR5ED714	Super Red	628	Red Diffused	30	60	1.9	20
L-513SRD-TRFHJ	LJR5SRD713	Hyper Red	640	Red Diffused	40	60	1.9	20



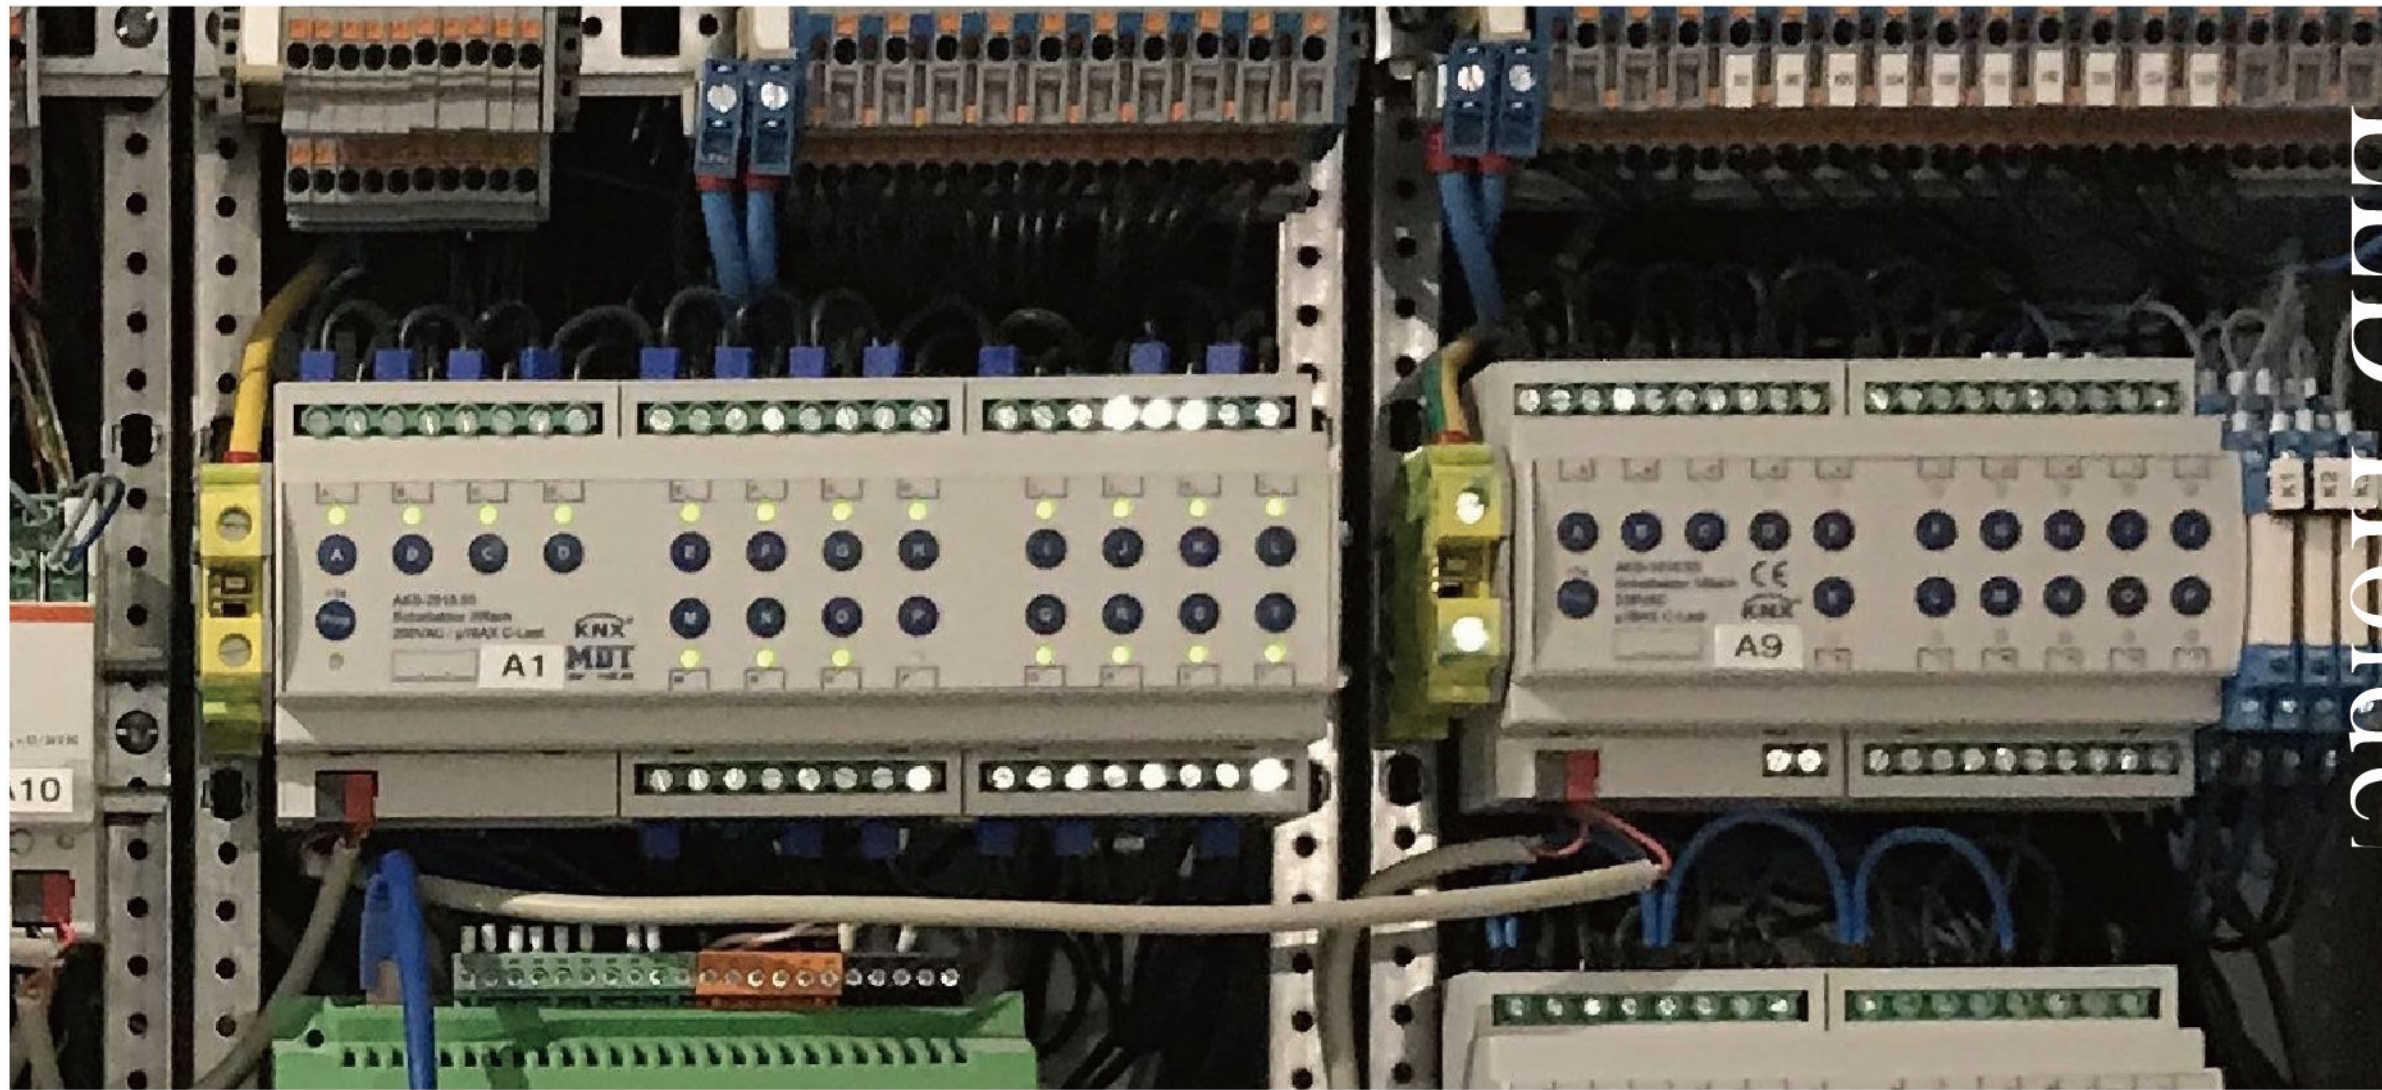


LED Indicator

Single Level Circuit Board Indicator

APPLICATIONS


- ◆Computing server ◆Signboard
- ◆IoT indication ◆Hi-Fi system
- ◆Uninterruptible power system



Holder Single Color

LHA143


Outline Dimensions 3 mm

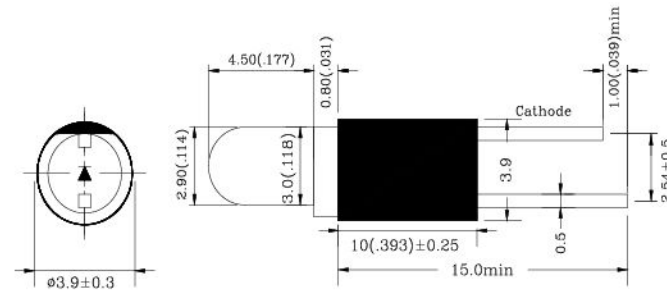

Part No.	LED Lamp	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LHA14313	A= L3X4GD	Yellow Green	572	Green Diffused	20	60	2.2	30
LHA14314	A= L3X4YD	Yellow	587	Yellow Diffused	25	60	2.2	30
LHA14315	A= L3X4HD	Red	700	Red Diffused	1.8	60	2.0	30

LH31C


Outline Dimensions 3 mm

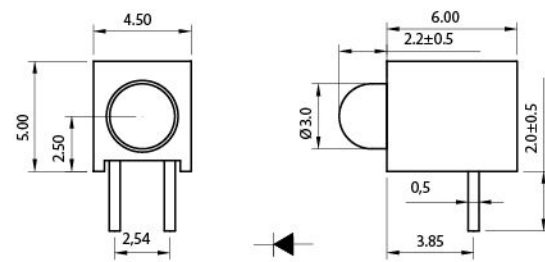

Part No.	LED Lamp	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LH31C015P	A=L-354UB5D	Blue	465	Blue Diffused	200	70	3	30
LH31C016P	A=L-304UP5D	Purple	(0.19, 0.06)	Purple Diffused	450	40	2.9	30

LH512



Outline Dimensions 5 mm

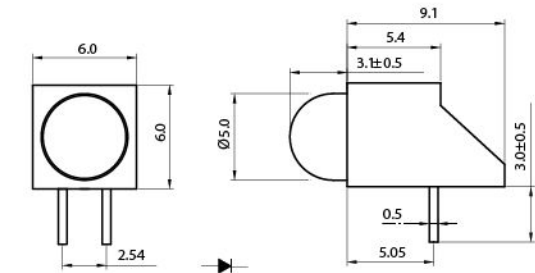

Part No.	LED Lamp	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LH512005B	A=L-503GD	Yellow Green	570	Green Diffused	25	80	2.1	30
LH512006B	A=L-503YD	Yellow	587	Yellow Diffused	5	80	2.1	30
LH512007B	A=L-503HD	Red	650	Red Diffused	5	80	2.1	30
LH512008B	A=L-503ED	Orange	628	Red Diffused	20	80	2	30

LH513

Outline Dimensions 5 mm

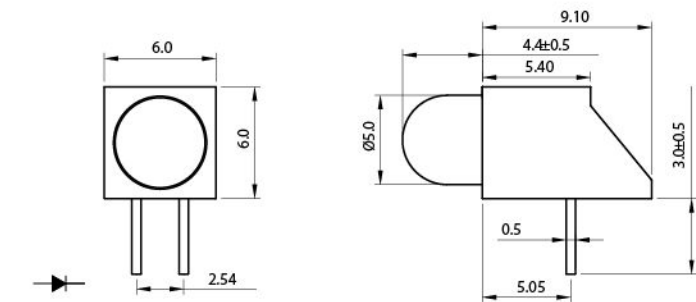


Part No.	LED Lamp	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LH513005B	A=L-523GD	Yellow Green	568	Green Diffused	20	80	1.9	20
LH513006B	A=L-523YD	Yellow	587	Yellow Diffused	20	80	2.1	20
LH513008B	A=L-523ED	Orange	628	Red Diffused	10	80	1.9	20
LH513009B	A=L-523SRD	Red	640	Red Diffused	20	80	1.9	20

Holder Dual Color

LH31C


Outline Dimensions 3 mm

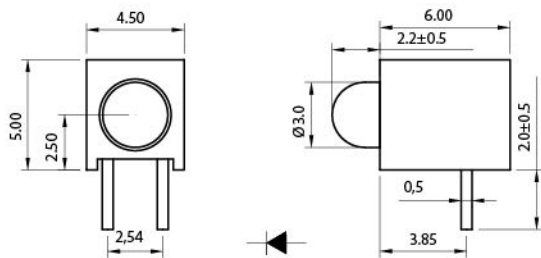

Part No.	LED Lamp	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_f (V)	Forward Current I_f (mA)
LH31C017P	A=L-357EGW	Orange Yellow Green	628 568	White Diffused	12 15	120	2.1	30


LH31F

Outline Dimensions 3 mm

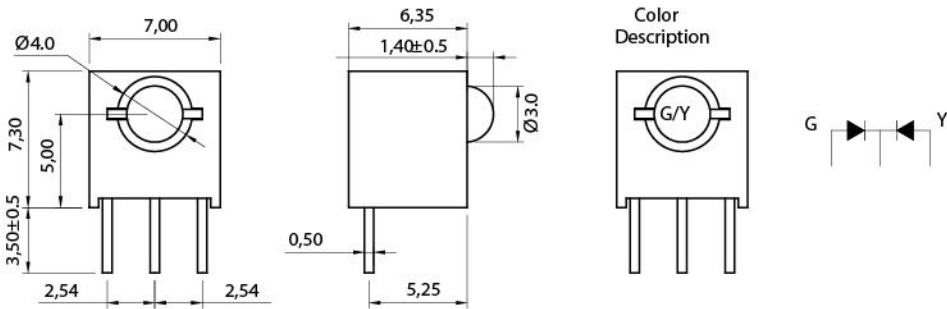

Part No.	LED Lamp	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_f (V)	Forward Current I_f (mA)
LH31F103E	A=L359GYW	Yellow Yellow Green	586 570	White Diffused	10 4	60	2.1 2.2	30
LH31F104E	A=L359EGW	Orange Yellow Green	628 568	White Diffused	18 14	100	2.1 2.2	30




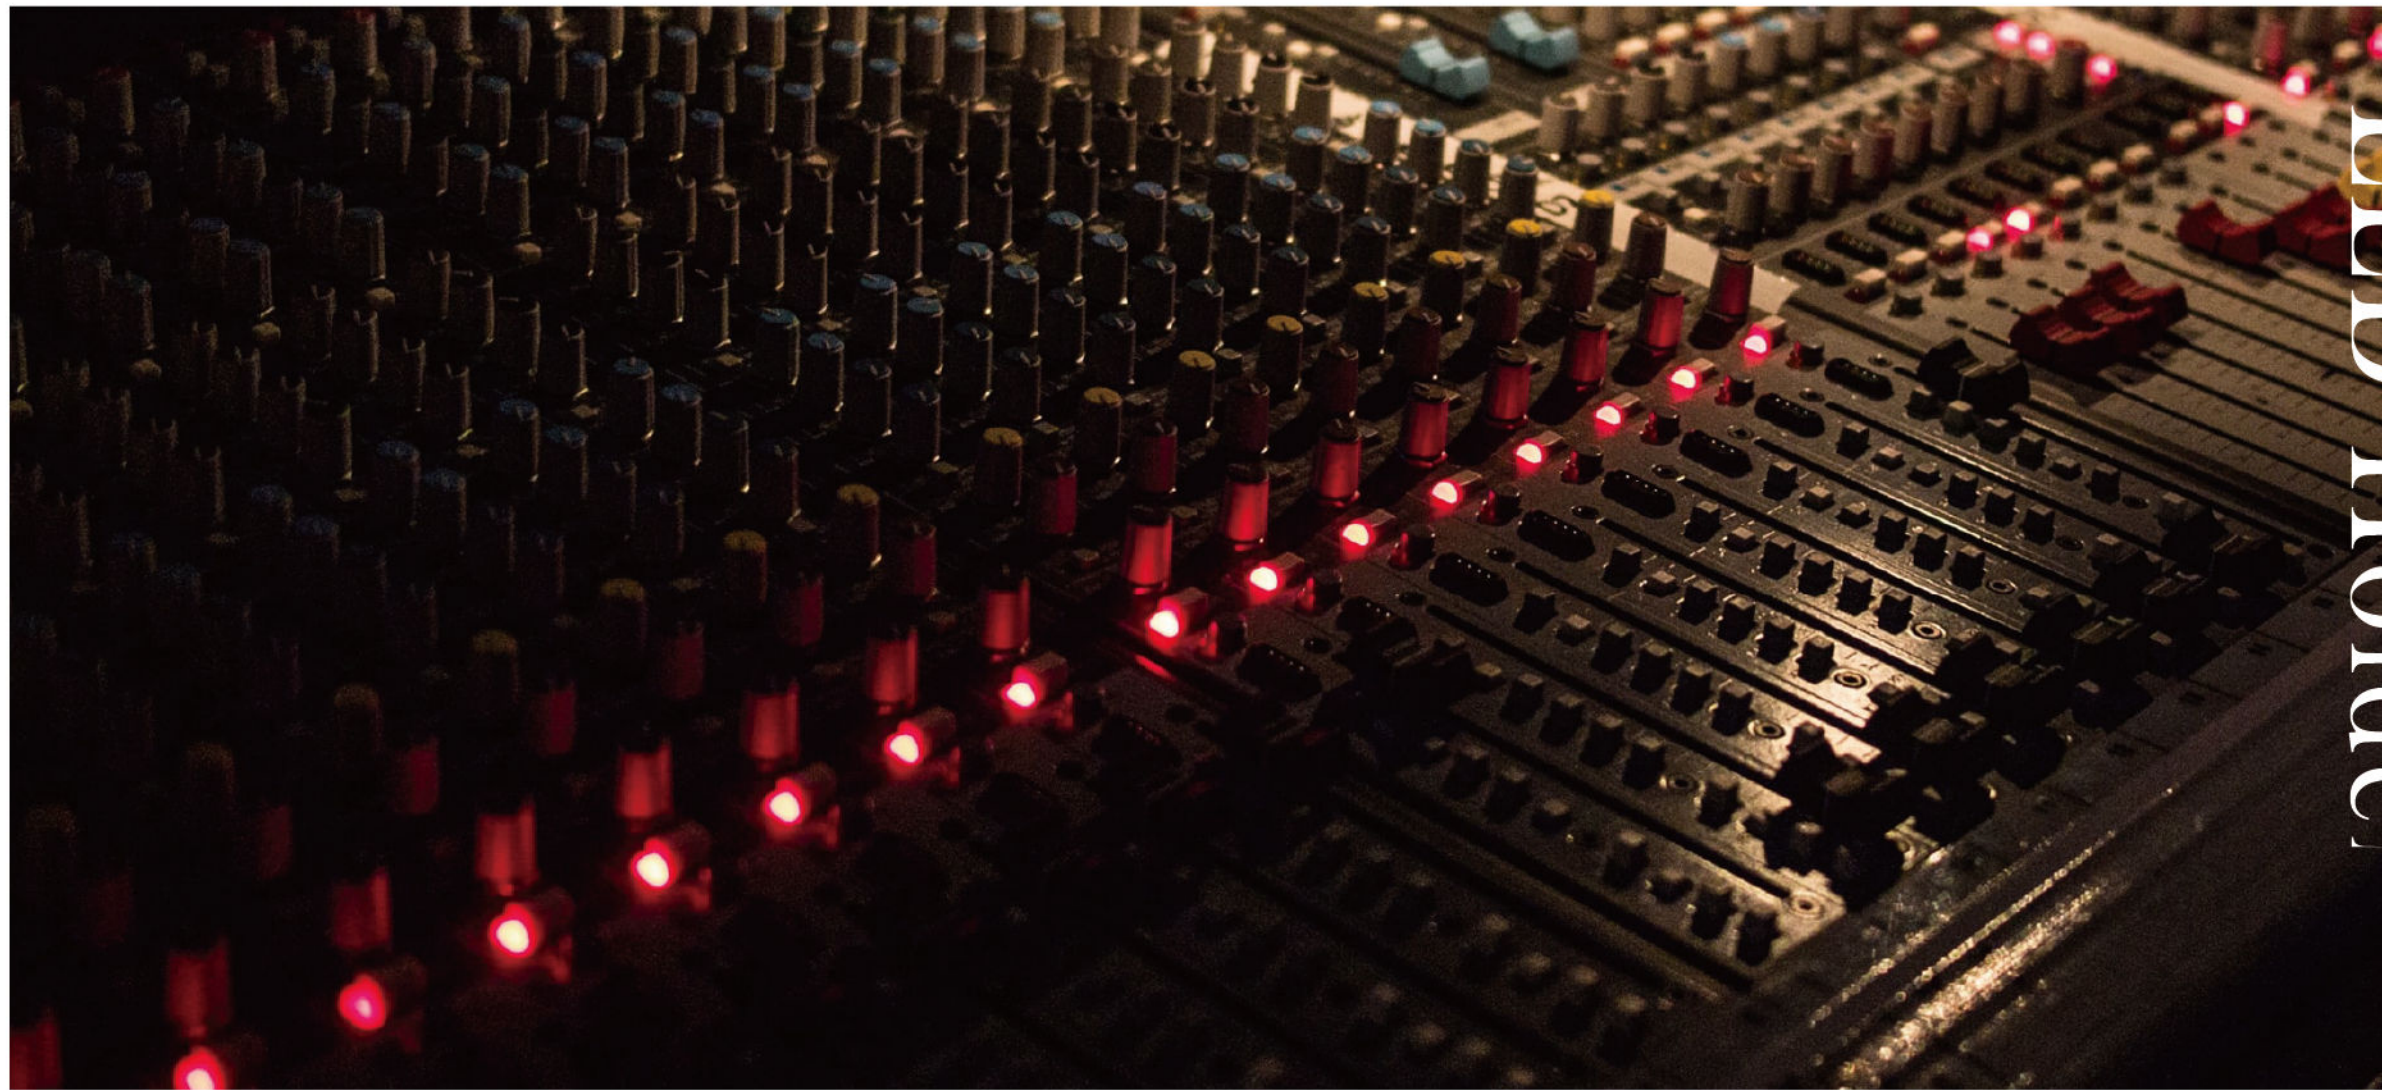


LED Holder

Dual Level Circuit Board Indicator


APPLICATIONS

- ◆ Computing server ◆ Signboard
- ◆ IoT indication ◆ Hi-Fi system
- ◆ Uninterruptible power system

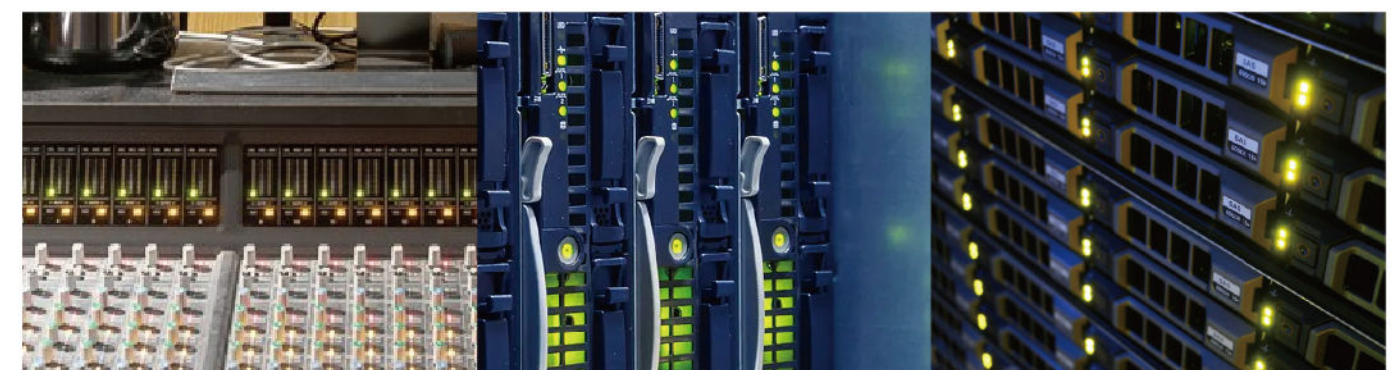

Holder Single Color


LH523
Outline Dimensions 5 mm

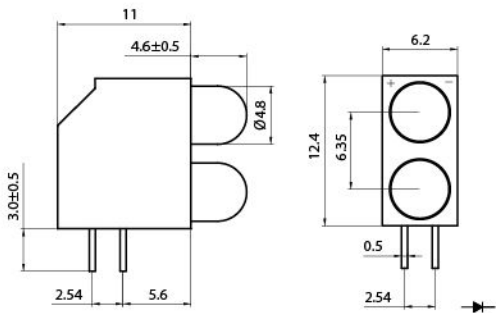

Part No.	LED Lamp	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LH523005B	A=B= L-523GD	Yellow Green	568	Green Diffused	18	80	1.9	30
LH523006B	A=B= L-523YD	Yellow	587	Yellow Diffused	18	80	2.1	30


Holder Dual Color

LH32K
Outline Dimensions 3 mm

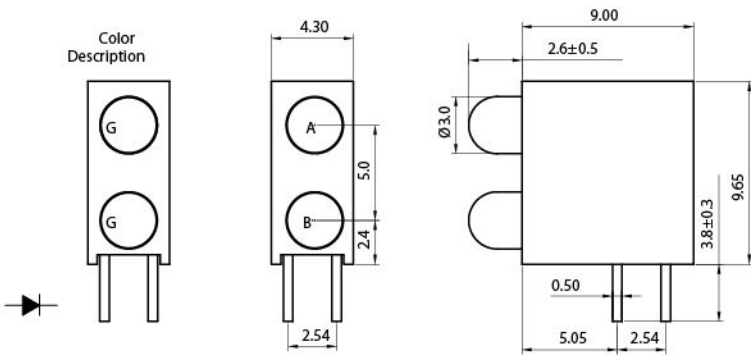

Part No.	LED Lamp	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LH32K047F	A= L3524ED B= L3524LY1D	Orange Yellow	628 587	Red Diffused Yellow Diffused	30 15	50	1.9	30
LH32K048F	A= L3524ED B= L3524GD	Orange Yellow Green	628 570	Red Diffused Green Diffused	30 15	50	1.9	30

LH32K
Outline Dimensions 3 mm

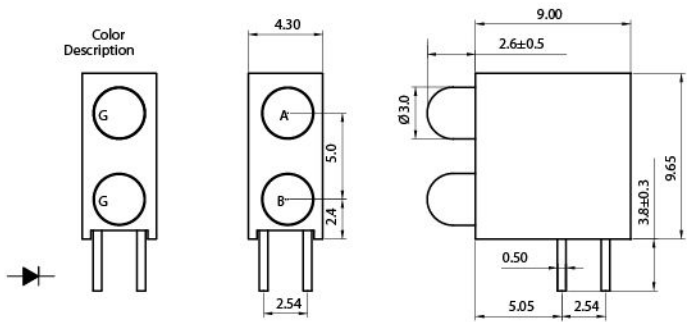

Part No.	LED Lamp	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LH32K036F	A=B= L3524GD	Yellow Green	570	Green Diffused	10	60	1.9	30
LH32K046F	A=B= L3524ED	Orange	628	Red Diffused	30	50	1.9	30




LED Holder

Tri Level Circuit Board Indicator

APPLICATIONS


- ◆ Computing server ◆ Signboard
- ◆ IoT indication ◆ Hi-Fi system
- ◆ Uninterruptible power system

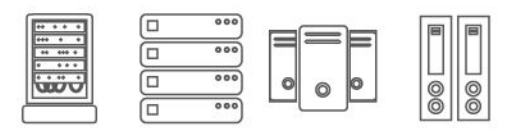

Holder Dual Color


LH33C

Outline Dimensions 3 mm

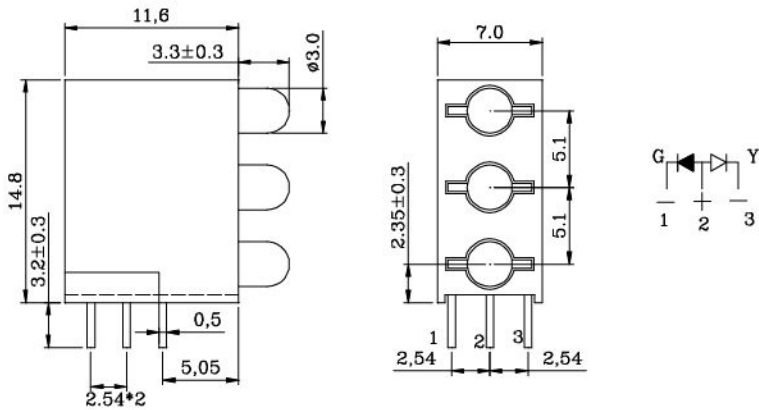

Part No.	LED Lamp	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LH33C204D-HTS	A=B=C=L329YGW	Yellow	587	White Diffused	8	80	2.0	30
		Yellow Green	570		5			
LH33C203D-HTS	A=B=C=L329EGW	Red	624	White Diffused	12	80	2.0	30
		Green	570		8			



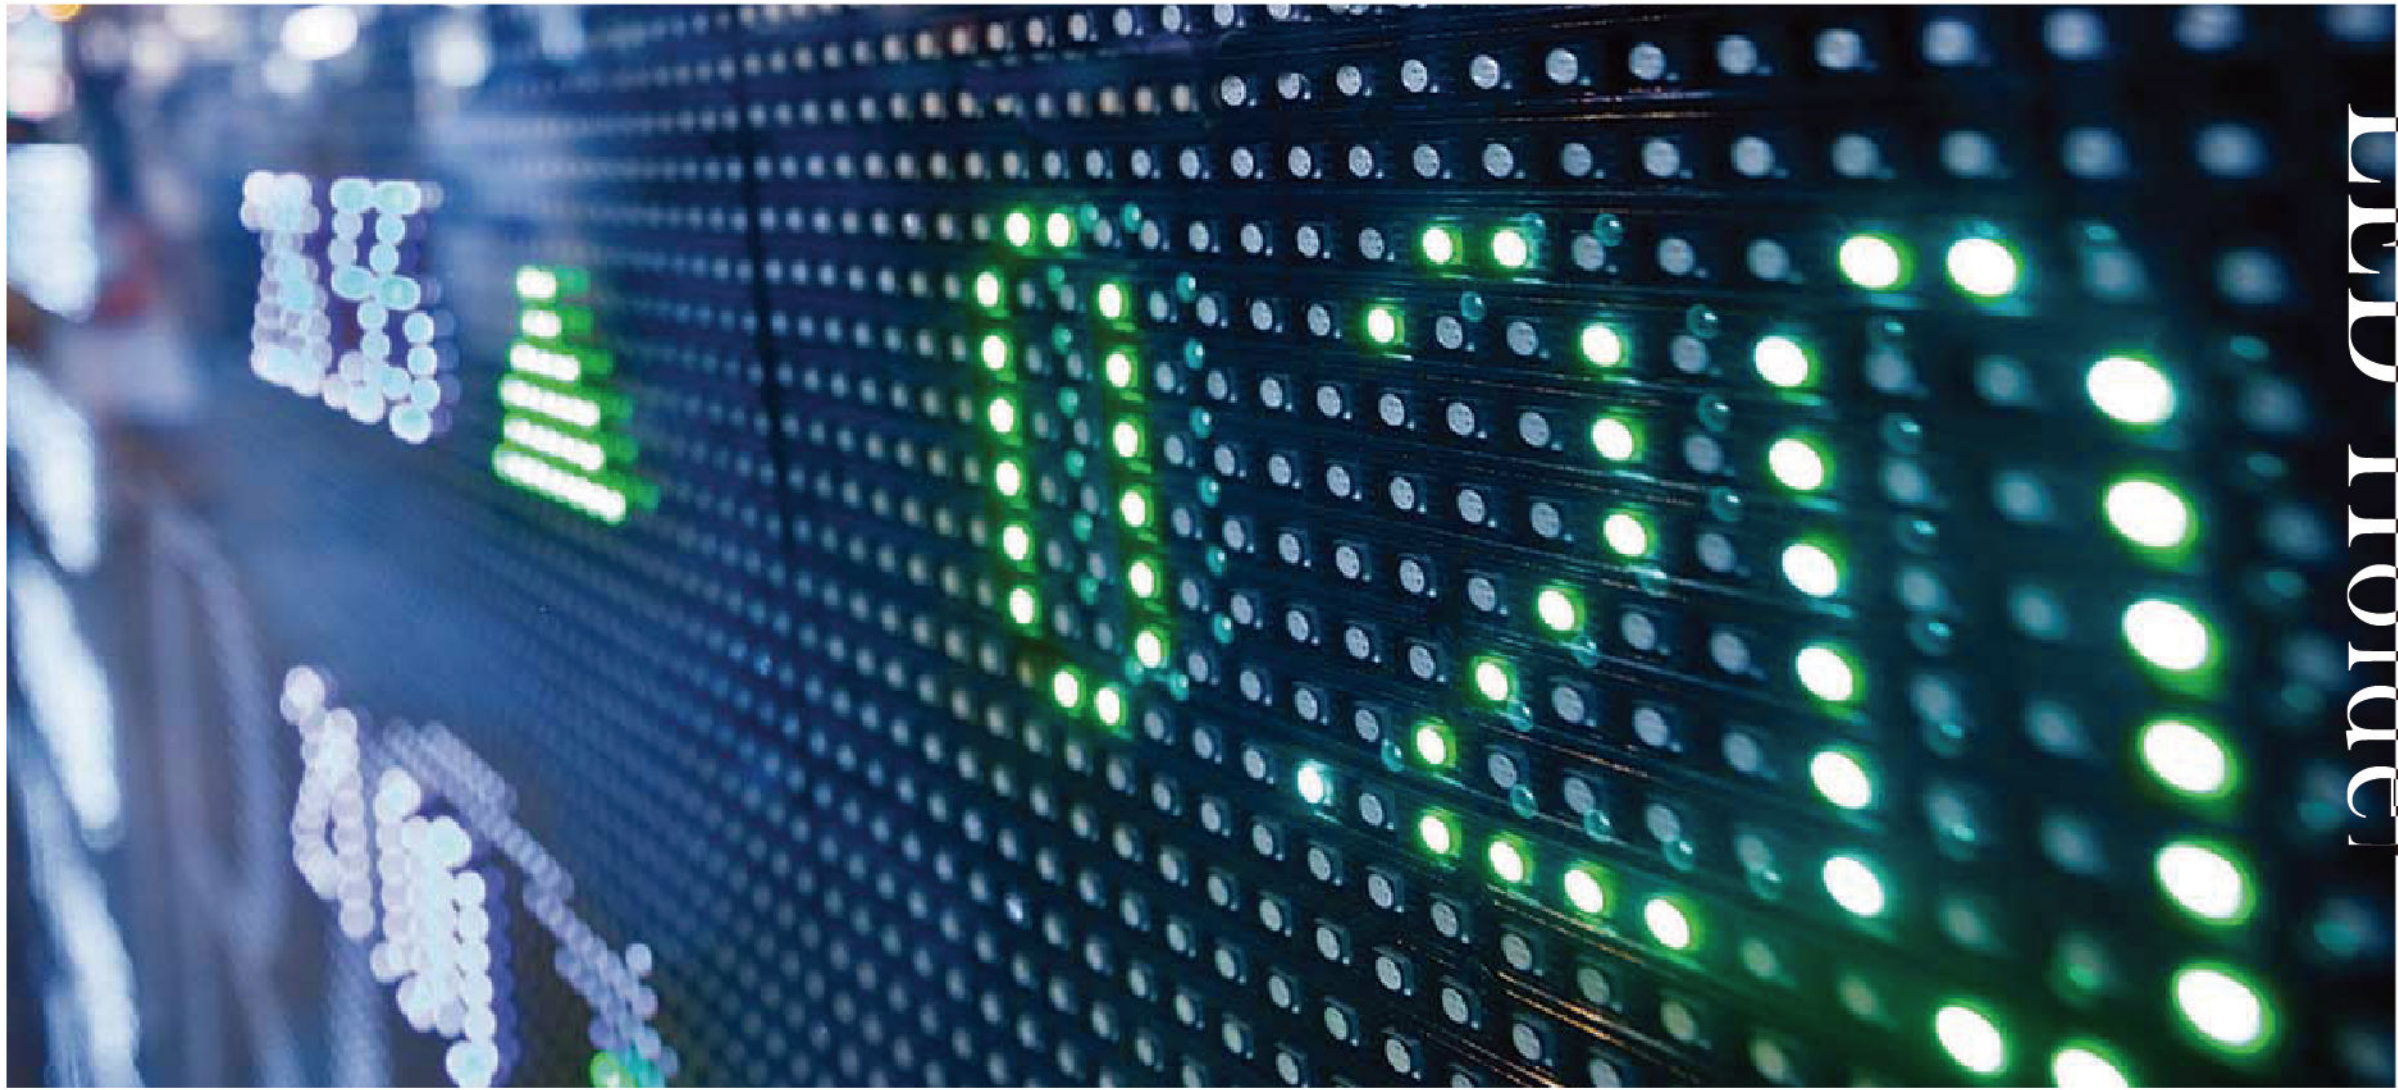


LED Holder

Four Level Circuit Board Indicator


APPLICATIONS

- ◆Computing server ◆Signboard
- ◆IoT indication ◆Hi-Fi system
- ◆Uninterruptible power system



LH34A


Outline Dimensions 3 mm

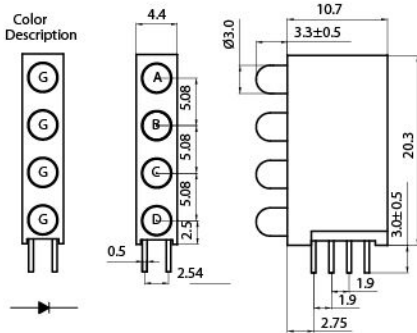

Part No.	LED Lamp	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LH34A006E	A=B=C=D=L3541GD	Green	568	Green Diffused	30	80	2.1	30
LH34A007E	A= L3541GD B=C=D= 0	Green	568	Green Diffused	20	80	2.1	30
LH34A032E	A=B=C=D=LGR3E018	Orange	628	Red Diffused	30	60	2.1	30
LH34A036E	A=C= L3541GD B=C=D=L3541YD	Yellow Green	587 568	Yellow Diffused Green Diffused	50 60	60	2.2	30

LH34D

Outline Dimensions 3 mm

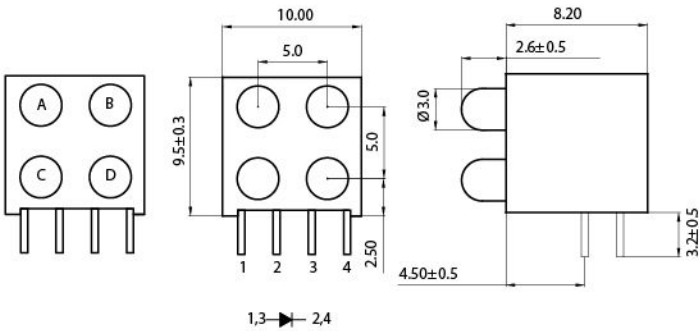

Part No.	LED Lamp	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LH34D201C	A=B=C=L324GD	Yellow Green	570	Green Diffused	20	60	2	30
	D=L324YD	Yellow	589	Yellow Diffused			2.1	
LH34D202C	A=L324YD	Yellow	589	Yellow Diffused	20	60	2	30
	B=D=L324GD C=L324SRD	Yellow Green Red	570 640	Green Diffused Red Diffused			2 2.1	






LED Holder

Multiple Circuit Board Indicator

APPLICATIONS


- ◆ Computing server ◆ Signboard
- ◆ IoT indication ◆ Hi-Fi system
- ◆ Uninterruptible power system



Holder Penta Level

LH35A

Outline Dimensions 3 mm


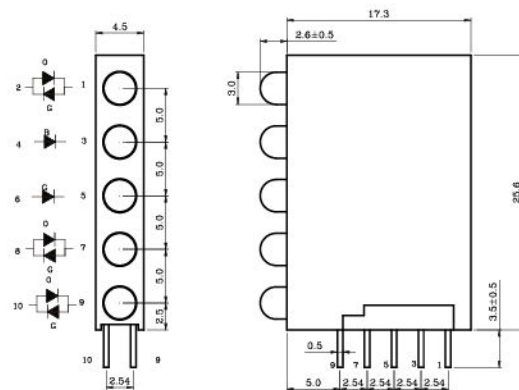


Part No.	LED Lamp	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LH35A005E	A=L327LESLPG6W	Super Amber	605	White Diffused	200	70	2.0	30
		Green	525	White Diffused	200	70	3.1	
	B=L3243UB5C	Blue	465	Water Clear	1500	30	3.0	
	C=L324LPG6D	Green	525	Green Diffused	600	150	3.0	
	D=E=L324LESLPG6W	Orange	605	White Diffused	80	150	2.0	
		Green	525	White Diffused	150	150	3.1	

Holder Octa and More Level

LH385

Outline Dimensions 3 mm

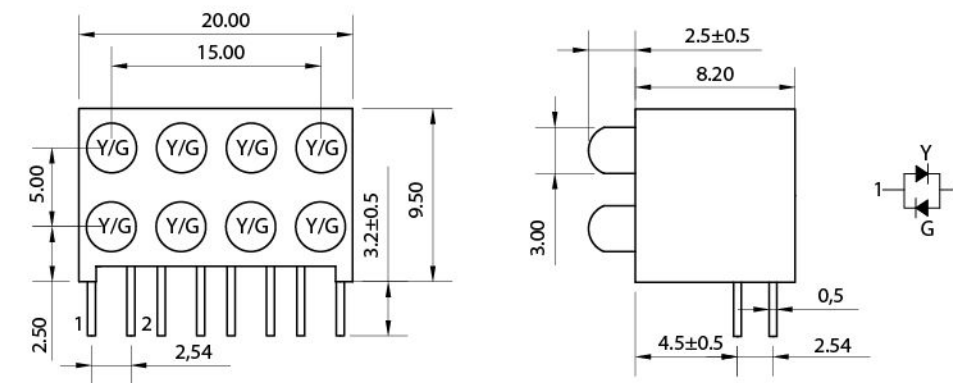


Part No.	LED Lamp	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LH385002C	A= L327GYW	Yellow Green	570	White Diffused	18	70	2	20
		Yellow	587		15		2.2	

Holder Hexa Level

LH36A

Outline Dimensions 3 mm

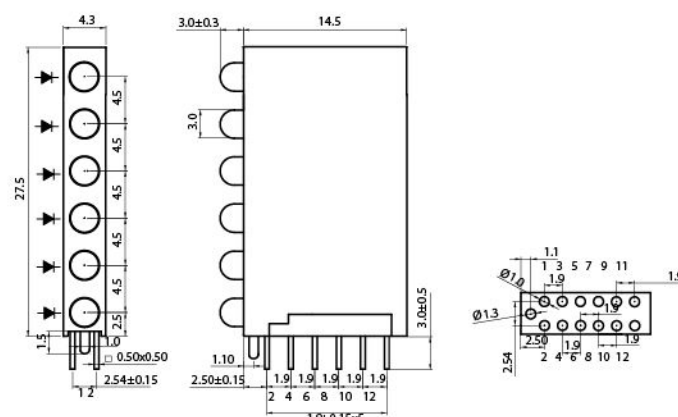


Part No.	LED Lamp	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LH36A100B	A=L3543GD	Yellow Green	570	Green Diffused	10	80	1.9	30
LH36A101B	A=L3541ED	Red	633	Red Diffused	10	80	1.8	30
	A=L3543GD	Yellow Green	570	Green Diffused	10		1.9	

Holder Octa and More Level

LH3G1

Outline Dimensions 3 mm

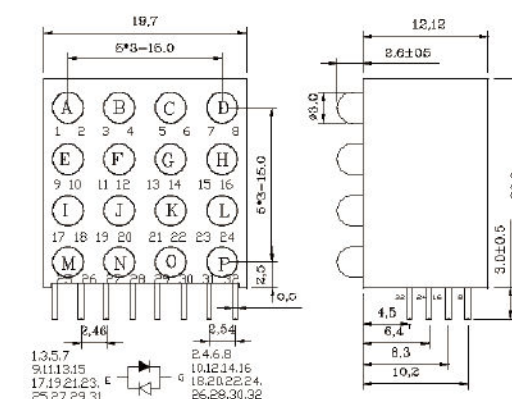

Part No.	LED Lamp	Color	Wavelength λ_d (nm)/ CIE (x,y)	Resin Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LH3G1009B	A~P= L327LESVG4W	Super Amber	605	White Diffused	150	80	2.1	30
		Green	570		120			

Headquarter

光鼎電子股份有限公司 Para Light Electronics Co., Ltd.

新北市中和區建康路8號11樓

11F, No. 8, Jiankang Rd., Zhonghe Dist.
New Taipei City, 23586 Taiwan

T +886-2-2225-3733 F +886-2-2225-4800

para@para.com.tw www.para.com.tw

Branch Offices

美國光鼎分公司 Para Light Corp. USA

515 Spanish Lane, Suite B, Walnut, CA 91789

F+909-468-4876 T+909-468-4866

sales@paralightusa.com www.paralightusa.com

印度光鼎分公司 Para Light India Pvt. Ltd.

No.979, 9th Floor, Aggarwal Cyber Plaza-2,
Netaji Subhash Place, Pitampura, New Delhi- 110034, India
T+011-41086226

abhinav.jha@para-india.com www.para.com.tw

Factories

連雲港光鼎電子有限公司 Para Light Lianyungang Electronics Co., Ltd.

中國江蘇省連雲港市灌南縣經濟開發區威海路8號

No.8, Wei Hai Rd., Guannan Economics Deveopment Zone,
Lianyungang City, Jiangsu Province, 223500, China

T+86-518-8369-2888 F+86-518-8369-2899

para@para.com.tw www.para.com.tw/zh-hans/

南京華鼎電子有限公司 Para Light Nanjing Electronics Co., Ltd.

中國江蘇省南京市江寧區湯山街湯泉西路1號

No.1, Tanguan W. Rd., Tangshan Ave., Jianning Dist. Nanjing City,
Jiansu Province, 211131 China

T+86-25-8410-7685 F+86-25-8410-7684

para@para.com.tw www.para.com.tw/zh-hans/

緬甸光鼎電子有限公司(仰光) Para Light Yangon Electronics Co., Ltd. (Myanmar)

No. 212, Pyin Si Minthar Gyi Street, Shwe Lin Ban Industry,
Hlaing Thar Yar Township, Yangon, Myanmar

T+95-9776964540

susie@parahk.com www.para.com.tw

Greater China Sales Teams

蘇州光鼎電子有限公司 East China Para Light (SUZHOU) Electronics Co., Ltd.

蘇州新區獅山路199號新地中心2104室

Room 2104, Xindi Center Building, No.199, Shishan Road Suzhou City,
Jiangsu Province, 215011 China

T+86-137-6164-0200

F+86-512-6809-7669

slssz@paralight.com.cn

光鼎深圳實業有限公司 South China Para Light (SHENZHEN) Electronics Co., Ltd.

中國深圳市龍華區龍華街道龍觀東路57號時代大廈1310-1312室

Room 1310-1312, Times Building, No. 57 Long Guan Dong Road,
Longhua Street, Longhua District, Shenzhen, 518110 China

T+86-189-2747-1103

eddy@paralight.com.cn

青島光鼎電子有限公司 North China Para Light (QINGDAO) Electronics Co., Ltd.

山東省青島市市北區山東路109號3號樓2901室

Room 2901, Building 3, No. 109 Shandong Road, Shibei District,
Qingdao, Shandong Province, 266000 China

T+0532-85692571 / 18626429477



Para Light Headquarters

Para Light Lianyungang



Para Light Nanjing

Para Light USA

Para Light India

Para Light Yangon